

700 Boulevard South Suite 102 Huntsville, AL 35802 Phone (256)713-1111 Fax (256)713-1112

Test Report for EAC 2005 VVSG Certification Testing Dominion Voting Systems Democracy Suite (D-Suite) Version 5.5-B Voting System

EAC Project Number: DVS-DemSuite5.5-B

Version: Rev. 02 Date: 08/21/2019



EAC Lab Code 1501



NVLAP LAB CODE 200908-0

SIGNATURES

Approved by:	Michael Walker, VSTL Project Manager	8 21/19 Date
Approved by:	Wendy Owens, VSTL Program Manager	8/21/19 Date

REVISIONS

Revision	Description	Date
00	Initial Release	08/05/2019
01	Updated with EAC Comments	08/20/2019
02	Added ECO information to section 2.2.1.2	08/21/2019

TABLE OF CONTENTS

1.0	INTR	ODUCTION	1
1.1	Descri	ption and Overview of EAC System Being Modified	1
1.2	Refere	nces	14
1.3	Terms	and Abbreviations	14
2.0	CERT	TFICATION TEST BACKGROUND	15
2.1	Revisi	on History	15
2.2	Scope	of Testing	16
	2.2.1	Modification Overview	17
		2.2.1.1 Detailed List of Changes	17
		2.2.1.2 ECO Assessment	17
	2.2.2	Block Diagram	19
	2.2.3	System Limits	20
	2.2.4	Supported Languages	21
	2.2.5	Supported Functionality	22
	2.2.6	VVSG	22
	2.2.7	RFIs	22
	2.2.8	NOCs	23
3.0	TEST	FINDINGS AND RECOMMENDATION	23
3.1	Summ	ary Findings and Recommendation	23
	3.1.1	Physical Configuration Audit (PCA)	23
	3.1.2	TDP Review	24
	3.1.3	QA & CM System Review	30
	3.1.4	Source Code Review, Compliance Build, Trusted build, and Build Documentation Review	30
	3.1.5	Security Testing	
	3.1.6	System Level Testing	31
		3.1.6.1 Functional Configuration Audit (FCA)	32
		3.1.6.2 Volume & Stress	33
		3.1.6.3 Accuracy	34
		3.1.6.4 System Integration	34
	3.1.7	Usability and Accessibility Testing	35
	3.1.8	Hardware Testing	36

3.2	Anomalies and Resolutions	39
3.3	Deficiencies and Resolutions	39
4.0	RECOMMENDATION FOR CERTIFICATION	39
ATT	ΓACHMENT A HARDWARE TEST REPORTS	A-1
ATI	FACHMENT B AS-RUN TEST PLAN	B-1

1.0 INTRODUCTION

The purpose of this Test Report is to document the procedures that Pro V&V, Inc. followed to perform certification testing during a system modification campaign for the Dominion Voting Systems Democracy Suite (D-Suite) 5.5-B Voting System to the requirements set forth for voting systems in the U.S. Election Assistance Commission (EAC) 2005 Voluntary Voting System Guidelines (VVSG), Version 1.0. Certification testing of D-Suite 5.5-B was performed to ensure the applicable requirements of the EAC VVSG 1.0 and the EAC Testing and Certification Program Manual, Version 2.0 were met. Additionally, all EAC Request for Interpretations (RFI) and Notices of Clarification (NOC) relevant to the system under test were incorporated in the test campaign.

Prior to submitting the voting system for testing, Dominion Voting Systems submitted an application package to the EAC for certification of the D-Suite 5.5-B Voting System. The application was accepted by the EAC and the project was assigned the unique Project Number of DVS-DemSuite5.5-B.

1.1 Description and Overview of EAC Certified System Being Modified

The EAC Certified System that is the baseline for the submitted modification is described in the following subsections. All information presented was derived from the previous Certification Test Report, the EAC Certificate of Conformance and/or the System Overview.

The D-Suite 5.5-B Voting System is a paper-based optical scan voting system with a hybrid paper/DRE option consisting of the following major components: The Election Management System (EMS), the ImageCast Central (ICC), the ImageCast Precinct (ICP and ICP2), the ImageCast X (ICX) DRE w/ Reports Printer, ImageCast X (ICX) DRE w/VVPAT, the ImageCast Evolution (ICE), and the ImageCast X (ICX) BMD. The D-Suite 5.5-B Voting System configuration is a modification from the EAC approved D-Suite 5.5 system configuration.

The following subsections describe the baselined D-Suite 5.5 Voting System.

Election Management System (EMS)

The D-Suite 5.5 EMS consists of various components running as either a front-end/client application or as a back-end/server application. A listing of the applications and a brief description of each is presented below.

Front-end/Client applications:

EMS Adjudication: Represents the client component responsible for adjudication, including reporting and generation of adjudicated result files from ImageCast Central tabulators and adjudication of write-in selections from ImageCast Precinct and ImageCast Central tabulators. This client component is installed on both the server and the client machines.

- <u>EMS Audio Studio:</u> A client application that represents an end-user helper application used to record audio files for a given election project. As such, it is utilized during the pre-voting phase of the election cycle.
- <u>EMS Election Data Translator:</u> End-user application used to export election data from election project and import election data into election project.
- <u>EMS Election Event Designer:</u> A client application that integrates election definition functionality together with ballot styling capabilities and represents a main pre-voting phase end-user application
- <u>ImageCast Voter Activation:</u> An application, installed on a workstation or laptop at the polling place, which allows the poll workers to program smart cards for voters. The smart cards are used to activate voting sessions on ImageCast X.
- EMS Results Tally and Reporting: A client application that integrates election results acquisition, validation, tabulation, reporting, and publishing capabilities and represents the main post-voting phase end-user application.

Back-end/Server applications:

- EMS Adjudication Service: Represents a server side application which provides ballot information such as contests, candidates and their coordinates from EMS to the Adjudication application.
- <u>EMS Application Server:</u> Represents a server side application responsible for executing long running processes, such as rendering ballots, generating audio files and election files, etc.
- <u>EMS Database Server:</u> Represents a server side RDBMS repository of the election project database which holds all the election project data, including pre-voting and post-voting data.
- EMS Data Center Manager: A server application that represents a system level configuration application used in EMS back-end data center configuration.
- <u>EMS File System Service</u>: A back-end application that acts as a stand-alone service that runs on client machines, enabling access to low level operating system API for partitioning CF cards, reading raw partition on ICP CF card, etc.
- <u>EMS NAS Server:</u> Represents a server side file repository of the election project file based artifacts, such as ballots, audio files, reports, log files, election files, etc.
- Smart Card Helper Service: A service that is installed on a workstation or laptop at the
 polling place, and provides required data format for programming smart cards for
 ImageCast devices, or, for jurisdiction's voting registration system in case of integration.

ImageCast Precinct (ICP)

The ICP device is a hybrid precinct optical scan paper/DRE ballot counter designed to provide six major functionalities: ballot scanning, second chance voting, accessible voting, ballot review, tabulation, and poll worker functions.

For ballot scanning functionality the ICP scans marked paper ballots, interprets voter marks on the paper ballots and stores the ballots for tabulation when the polls are closed.

Second Chance voting refers to scenarios in which an error has been detected on the voter's paper ballot (e.g., blank ballot, undervoted ballot, overvoted ballot, misread ballot, cross-over voted ballot), and the ICP notifies the voter by displaying a message or providing an audio visual cue, that one of these situations has been detected, and offers the voter an opportunity to reject and fix their ballot, or to cast the ballot as-is.

Accessible voting allows voters with disabilities to listen to an audio representation of a ballot and use a hand held controller called an Audio Tactile Interface (ATI) to make vote selections, which are then saved directly to the ICP when the voter casts their Accessible Voting ballot.

The Ballot Review feature allows a voter to review their vote selections using an audio or visual representation, which displays or presents the voter with a complete listing of all contests contained on the ballot and an indication of the results which will be recorded for each contest once the voter's ballot is cast.

The Tabulation of paper ballots and Accessible Voting ballots cast by voters is performed when the polls are closed on the ICP unit and the unit tabulates the results, generates results files for aggregation into RTR, and prints a results report containing the results of the ballots cast.

For poll worker functions the ICP contains a small touch-screen LCD to allow the poll worker to initiate polling place activities, diagnostics and reports.

ImageCast Central (ICC) Count Scanner

The ICC is a high-speed, central ballot scan tabulator based on Commercial off the Shelf (COTS) hardware, coupled with the custom-made ballot processing application software. It is used for high speed scanning and counting of paper ballots.

ImageCast X (ICX)

The Democracy Suite ImageCast X (ICX) consists exclusively of COTS available hardware and operating system, while the applications installed on top customize its behavior to turn it into a Ballot Marking Device (BMD) or a Direct-Recording Electronic (DRE) device with or without a Voter Verifiable Paper Audit Trail (VVPAT). ICX application is the application that verifies voter's session eligibility, using the smart card and then presents the appropriate ballot to the voter. When a voter is satisfied with choices selected, ICX application verifies them and produces an Electronic Mobile Ballot or stores the votes onto a memory device. The ICX is designed to perform the following functions:

- Ballot marking and printing of electronic mobile ballots (in BMD mode)
- Ballot review and second chance voting
- Accessible voting and ballot marking
- Saving voting results (in DRE mode)
- Printing votes on a voter verifiable paper audit trail device (when VVPAT is in use)

1.1.1 Baseline Certified System

The baseline system for this modification is the D-Suite 5.5 Voting System. The tables below describe the certified equipment and firmware versions. Detailed descriptions of the D-Suite 5.5 test campaign are contained in Pro V&V Report No.TR-01-01-DVS-2017-02.01 Rev. B, which is available for viewing on the EAC's website at www.eac.gov.

This subsection lists the proprietary and COTS software to be provided by the manufacturer as part of the test campaign.

Table 1-1. Democracy Suite 5.5 EMS Software Component Descriptions

C - C 4	¥7•	1721	Configuration	
Software	Version	Filename	Standard	Express
EMS Election Event Designer (EED)	5.5.12.1	setup.exe: 5.5.12.1 EED_FED_CERT_Setup_x64.m si		X
EMS Results Tally and Reporting (RTR)	5.5.12.1	setup.exe: RTR_FED_CERT_Setup_x64.m si	X	X
EMS Application Server	5.5.12.1	setup.exe: APPS_FED_CERT_Setup_x64. msi	X	X
EMS File System Service (FSS)	5.5.12.1	setup.exe: FSSSetup.msi	X	X
EMS Audio Studio (AS)	5.5.12.1	setup.exe: EMSAudioStudioSetup.msi	X	X
EMS Data Center Manager (DCM)	5.5.12.1	DemocracySuiteEMS_DCM.exe	X	X
EMS Election Data Translator (EDT)	5.5.12.1	setup.exe: EDTSetup_x86.msi EDTSetup_x64.msi	X	X
ImageCast Voter Activation (ICVA)	5.5.12.1	setup.exe: ICVASetup.msi	X	X
EMS Adjudication (Adj.)	5.5.8.1	DVS ImageCast Adjudication Client Setup.msi	X	X
EMS Adjudication Service	5.5.8.1	DVS Adjudication Services Setup.msi	X	X
Smart Card Helper Service	5.5.12.1	setup.exe: SmartCardServiceSetup.msi	X	X

Table 1-2. Democracy Suite 5.5 ImageCast Precinct Software Component Descriptions

Firmware/Software	Version	Filename
Election Firmware	5.5.3-0002	cf2xx.sig
Firmware Updater	5.5.3-0002	firmUp.enc
Firmware Extractor	5.5.3-0002	FirmwareExtract.enc
Kernel (uClinux)	5.5.3-0002	image.bin.gz
Boot Loader (COLILO)	20040221	colilo.bin
Asymmetric Key Generator	5.5.3-0002	Keygen.enc
Asymmetric Key Exchange Utility	5.5.3-0002	KeyExchange.enc
Firmware Extractor (Uses Technician Key)	5.5.3-0002	TechExtract.enc

Table 1-3. Democracy Suite 5.5 ImageCast Central Software Component Descriptions

Firmware/Software	Version	Filename
ImageCast Central Application	5.5.3.0002	ICCSetup.exe

Table 1-4. Democracy Suite 5.5 ImageCast X Software Component Descriptions

Firmware/Software	Version	Filename
ICX Application	5.5.10.25	ICX.apk

Table 1-5. Democracy Suite 5.5 EMS Client/Server Software Component Descriptions

Firmware/Software	Version	Filename	Configuration	
rifiliware/Software	Version	riiename	Standard	Express
Microsoft Windows Server	2012 R2 Standard	Physical Media from Microsoft	X	
Microsoft Windows	10 Professional	Physical Media from Microsoft	X	X
.NET Framework	3.5	Physical Media from Microsoft	X	X
Microsoft Visual J#	2.0	vjredist64.exe vjredist.exe	X	X
Microsoft Visual C++ 2013 Redistributable	2013	vcredist_x64.exe vcredist_x86.exe	X	X
Microsoft Visual C++ 2015 Redistributable	2015	vc_redist.x64.exe vc_redist.x86.exe	X	X
Java Runtime Environment	7u80	jre-7u80-windows-x64.exe jre-7u80-windows-i586.exe	X	X
Java Runtime Environment	8u144	jre-8u144-windows-x64.exe jre-8u144-windows-i586.exe	X	X
Microsoft SQL Server 2016 Standard	2016 Standard	Physical Media from Microsoft	X	

Table 1-5. Democracy Suite 5.5 EMS Client/Server Software Component Descriptions (continued)

F:/C - 64	¥7	1721	Configuration	
Firmware/Software	Version	Filename	Standard	Express
Microsoft SQL Server 2016 Service Pack 1	2016 SP1	SQLServer2016SP1- KB3182545-x64-ENU.exe	X	
Microsoft SQL Server 2016 SP1 Express	2016 SP1	SQLEXPRADV_x64_ENU.exe		X
Cepstral Voices	6.2.3.801	Allison (English): Cepstral_Allison_windows_6.2. 3.801.exe Alejandra (Spanish): Cepstral_Alejandra_windows_6 .2.3.801.exe	X	X
Arial Narrow Fonts	2.37a	ARIALN.TTF ARIALNB.TTF ARIALNBI.TTF ARIALNI.TTF	X	X
Maxim iButton Driver	4.05	install_1_wire_drivers_x86_v4 05.msi install_1_wire_drivers_x64_v4 05.msi	X	X
Adobe Reader DC	AcrobatDC	AcroRdrDC1501020060_en_U S.exe	X	X
Microsoft Access Database Engine	2010	AccessDatabaseEngine.exe AccessDatabaseEngine_x64.ex e	X	X
Open XML SDK 2.0 for Microsoft Office	2.0	OpenXMLSDKv2.msi	X	X

Table 1-6. Democracy Suite 5.5 EMS Software Platform Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
Infragistics NetAdvanatage Win Forms 2011.1	2011 Vol.1	NetAdvantage_WinForms_20111.msi
Infragistics NetAdvanatage WPF 2012.1	2012 Vol.1	NetAdvantage_WPF_20121.msi
TX Text Control Library for .NET	16.0	TXText Control.NET for Windows Forms 16.0.exe
SOX	14.3.1	sox.exe , libgomp-1.dll, pthreadgc2.dll, zlib1.dll
NLog	1.0.0.505	NLog.dll
iTextSharp	5.0.5	itextsharp.dll
OpenSSL	1.0.2k & 2.0.14 FIPS	openssl.exe, libeay32.dll, ssleay32.dll

Table 1-6. Democracy Suite 5.5 EMS Software Platform Unmodified COTS Component Descriptions (continued)

Firmware/Software	Version	Filename
SQLite	1.0.103.0	System.Data.SQLite.DLL (32-bit and 64-bit)
Lame	3.99.4	lame.exe
Speex	1.0.4	speexdec.exe and speexenc.exe
Ghostscript	9.04	gsdll32.dll (32-bit and 64-bit)
One Wire API for .NET	4.0.2.0	OneWireAPI.NET.dll
Avalon-framework-cvs- 20020806	20020806	avalon-framework-cvs-20020806.jar
Batik	0.20-5	batik.jar
Fop	0.20-5	fop.jar
Microsoft Visual J# 2.0 Redistributable Package- Second Edition(x64)	2.0	vjc.dll , vjsjbc.dll, vjslibcw.dll, vjsnativ.dll , vjssupuilib.dll , vjsvwaux.dll
Entity framework	6.1.3	EntityFramework.dll
Spreadsheetlight	3.4.3	SpreadsheetLight.dll, SpreadsheetLight.xml
Open XML SDK 2.0 For Microsoft Office	2.0.5022.0	DocumentFormat.OpenXml.dll, DocumentFormat.OpenXml.xml

Table 1-7. Democracy Suite 5.5 ImageCast Precinct Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
Zlib	1.2.3	Zlib-1.2.3.tar.gz

Table 1-8. Democracy Suite 5.5 ImageCast X Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
		ARM:
		com.google.android.tts_3.11.12-
Coogle Toyt to		210311121_minAPI19(armeabi-v7a)(nodpi).apk
Google Text-to-	3.11.12	
Speech Engine		x86:
		com.google.android.tts_3.11.12-
		210311123_minAPI15(x86)(nodpi).apk
ICX Prime Android	0405	0405 5 1 1 01 12 year android v96 ico
5.1.1 Image	0403	0405_5.1.1-01.12_user_android_x86.iso
ICX Classic Android	0.0.00	but t ami2 64 ata DCV19 V0 0 00 min
4.4.4 Image	0.0.98	byt_t_crv2_64-ota-BCX18-V0.0.98.zip

Table 1-9. Democracy Suite 5.5 ImageCast Central Software Build Library Source Code (Unmodified COTS)

Firmware/Software	Version	Filename
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz

Table 1-10. Democracy Suite 5.5 ImageCast Central Runtime Software Components (Unmodified COTS)

Firmware/Software	Version	Filename
1-Wire Driver (x86)	4.05	install_1_wire_drivers_x86_v405.msi
1-Wire Driver (x64)	4.05	install_1_wire_drivers_x64_v405.msi
Canon DR-G1130 TWAIN Driver	1.2 SP6	G1130_DRIT_V12SP6.exe
Canon DR-M160II TWAIN Driver	1.2 SP6	M160II_DRIT_V12SP6.exe
Visual C++ 2013 Redistributable (x86)	12.0.30501	vcredist_x86.exe

Table 1-11. Democracy Suite 5.5 ImageCast Precinct Modified COTS Software Component Descriptions

Firmware/Software	Version	Filename
uClinux	20070130	uClinux-dist-20070130.tar.gz
COLILO Bootloader	20040221	Colilo20040221.tar.gz

Table 1-12. Democracy Suite 5.5 ImageCast X Modified COTS Software Component Descriptions

Firmware/Software	Version	Filename
Zxing Barcode Scanner	4.7.5	BS-4.7.5.zip
SoundTouch	1.9.2	Soundtouch-1.9.2.tar.gz

Table 1-13. Democracy Suite 5.5 EMS Software Build Environment Component Descriptions

Firmware/Software	Version	Filename
Windows 10 Professional	10 Professional	Physical Media from Microsoft
.NET Framework 3.5	3.5	Physical Media from Microsoft
Internet Information Server (IIS)	10.0	Physical Media from Microsoft
7-Zip	9.20 (64 Bit)	7z920-x64.msi
Visual Studio 2015 Professional with Update 3	2015 Update 3	en_visual_studio_professional_2015_with _update_3_x86_x64_web_installer_8922 978.exe

Table 1-13. Democracy Suite 5.5 EMS Software Build Environment Component Descriptions (continued)

Firmware/Software	Version	Filename
.NetDiscUtils	0.10	DiscUtilsBin-0.10.zip
Infragistics NetAdvantage Win Forms 2011.1	2011.1	NetAdvantage_WinForms_20111.msi
Infragistics Net Advantage – WPF 2012.1	2012.1	NetAdvantage_WPF_20121.msi
TX Text Control 16.0.NET	16	TX Text Control.NET for Windows Forms 16.0.exe
Speex	1.0.4	speex_win32_1.0.4_setup.exe
Microsoft Visual J#	2.0	vjredist64.exe
iTextSharp	5.0.5	itextsharp-5.0.5-dll.zip
Ghostscript	9.0.4	gs904w32.exe gs904w64.exe
Nlog	1.0.0.505	NLog-1.0-Refresh-bin.zip
OneWireAPI.NET	4.0	1-wiresdkver400_beta2.zip
Lame	3.99.4	lame3.99.4-20120130.zip
Sox	14.3.1	sox-14.3.1-win32.zip
Avalon Framework	20020806	avalon-framework-cvs-20020806.jar.zip
Fop	0.20-5	fop-0.20.5.jar
Batik	0.20-5	batik-1.5-fop-0.20-5.jar
SQLite	1.0.103.0	sqlite-netFx46-setup-bundle-x64-2015- 1.0.103.0.exe
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
Strawberry Perl	5.24.1.1	strawberry-perl-5.24.1.1-64bit.msi
Patch	2.5.9-7	patch-2.5.9-7-bin.zip
ISOnewspaper	30.4	ISOnewspaper30v4_gr.icc.zip
Ogg Vorbis Encoder	2.88	oggenc2.88-1.3.5-generic.zip
Ogg Vorbis Encoder	1.10.1	oggdecV1.10.1.zip
Prism Mvvm	1.1.1	prism.mvvm.1.1.1.nupkg
Bitmiracle.libtiff.net	2.4.560	Bitmiracle.libtiff.net.2.4.560.nupkg
Prism	4.0.0	prism.4.0.0.nupkg
Prism.UnityExtensions	4.0.0	prism.unityextensions.4.0.0.nupkg
PDF Printing	2.9.5.2	PDFPrinting.zip
Entity Framework	6.1.3.net45	entityframework.6.1.3.nupkg

Table 1-13. Democracy Suite 5.5 EMS Software Build Environment Component Descriptions (continued)

Firmware/Software	Version	Filename
WiX	3.10	Wix310.exe
Spreadsheet Light	3.4.3	spreadsheetlight.3.4.3.nupkg
Open XML SDK 2.0 for Microsoft Office	2.0	OpenXMLSDKv2.msi
Adobe Reader DC	AcrobatDC	AcroRdrDC1501020060_en_US.exe
Arial Narrow Fonts	2.37a	ArialNarrowFonts.zip
SSH.NET	2016.1.0	SSH.NET-2016.1.0-bin.zip
SSMS	14.0.17119.0	SSMS-Setup-ENU.exe
TwainDSM	2.3.0	Twaindsm-2.3.0.win.bin

Table 1-14. Democracy Suite 5.5 ICC Software Build Environment Component Descriptions

Firmware/Software	Version	Filename
NASM Assembler	2.12.02	nasm-2.12.02-win32.zip
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
CSC3-2010	N/A	CSC3-2010.crl
tss-ca-g2	N/A	tss-ca-g2.crl

Table 1-15. Democracy Suite 5.5 Adjudication Software Build Environment Component Descriptions

Firmware/Software	Version	Filename
Microsoft Enterprise Library	5.0	Enterprise Library 5.0.msi
Microsoft Prism	4.0.0	Prism.4.0.0.nupkg
Microsoft Identity Foundation SDK	4.0	WindowsIdentityFoundation-SDK-4.0.msi
Toggle Switch Control Library	1.1.1	ToggleSwitch 1.1.1.zip
Infragistics NetAdvantage Ultimate 2013.1	2013.1	NetAdvantage_20131_PlatformInst aller.zip
iTextSharp	5.5.1	itextsharp-all-5.5.1.zip
CLR Security	June 2010	clrsecurity_june10.zip
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
Community MSI Extensions	1.4	msiext-1.4.zip
TreeViewEx	3.0.0.0	TreeViewEx.dll

Table 1-16. Democracy Suite 5.5 ImageCast Precinct Election Firmware Compiler Descriptions

Firmware/Software	Version	Filename
g++ (GNU C++	gcc3.4.0-20040603	m68k-uclinux-tools-c++-gcc3.4.0-
compiler)	gcc3.4.0-20040003	20040603.sh

Table 1-17. Democracy Suite 5.5 ImageCast Precinct Firmware Build Environment Component Descriptions

Firmware/Software	Version	Filename
Ubuntu 16.04.1	16.04.1	ubuntu-16.04.1-desktop-i386.iso
Toolchain Installation Script	N/A	Toolchain.sh
m68k uClinux tools base gcc	3.4.0-20040603	m68k-uclinux-tools-base-gcc3.4.0- 20040603.sh
m68k uClinux tools c++ gcc	3.4.0-20040603	m68k-uclinux-tools-c++-gcc3.4.0- 20040603.sh
m68k uClinux tools gdb	20040603	m68k-uclinux-tools-gdb-20040603.sh
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz

Table 1-18. Democracy Suite 5.5 ImageCast X Firmware Build Environment Component Descriptions

Firmware/Software	Version	Filename	
Ubuntu 14.04.4	14.04.4	ubuntu-14.04.4-desktop-amd64.iso	

Table 1-19. D-Suite 5.5 Configuration Files

Configuration File	Version	Filename
Machine Configuration File (MCF)	5.5.10.20_20180806	MCF_5.5.10.20_20180806.mcf
Device Configuration File (DCF)	5.4.01_20170521	DCF_5.4.01_20170521.dcf

Table 1-20. D-Suite 5.5 Voting System Equipment

Component	Serial Number	
Proprietary Hardware		
ImageCast Precinct Optical Scanner PCOS-320C	AAFAJFM0061, AAFAJFN0030, AAFAJGI6764, AAFAJEL0352	
	AAFAJELU332	
ImageCast Precinct Optical Scanner PCOS-320A	AANAGCP0347, AANAGCP0002	
ICP Ballot Box BOX-330A	AAUCCFX0083, AAUCCGI0011	
ICX Inline EMI Filter	[DVS-EMIFILTER-001] thru [DVS-EMIFILTER-003]	
COTS Hardware		

Table 1-20. D-Suite 5.5 Voting System Equipment (continued)

Component	Serial Number	
ICX aValue 15" Tablet (SID-15V)	0E14AF00014, B03G005400006, B033G00540008, 9E274118, 1D274118, Baytrail98D750C0, Baytrail12034DCC, Baytrail9A6550C8	
ICX aValue 21" Tablet (SID-21V)	0E14AF00027, B03G005500019, 03G005500009, 0039BZ2D, 0039B209, Baytrail0039B22D, BaytrailF1B2587F, BaytrailF1B25983	
A Value 21" ICX DRE (Prime)	1707101522, 1707101789, 1707101730, 1707101887, 1707101710, 1707101725, 1707101731, 1708100916, 1708100876, 1708100915, 1707101845, 1707101778, 1717101720, 1707101845, 1707101722, 1707202552, 1711300282, 1707100089, 1707101795, 1707101793, 17101793	
SII Thermal Printer	1115271A, 1115273A, 115270A, 1115275A	
KFI VRP3 Thermal Printer (VVPAT)	KPR000000715, KPR0000078339, KPR0000078377, KPR000000711, KPR000000712, KPR170900010119, KPR0000078337, KPR0000078364, KPR170900008115, KPR0000078339, KPR170900008116, KPR170900010347, KPR170900009733, KPR170900010120, KPR170900010119, KPR170900010337, KPR170900010338, KPR170900010348	
Dell OptiPlex 7440 All In One	e HVNRFB2, HVNQFB2, HVNPFB2	
Dell PowerEdge R630	4Z07T52	
Dell PowerEdge R640	ЈМР9СМ2	
Canon imageFormula DR-G1130 Scanner	GF301092, GF304418	
Canon DR-M160II Scanner	GX333569, GX333573, GX324846, GX326272, GX319353	
Dell Precision T3420 PC	HS0VFB2, HS0TFB2, HS0RFB2, HS0SFB2, 4TB3MN2, F575HH2	
HP LaserJet Pro Printer M402dn	PHBQF20342, PHBQF20345, PHBQC12619, PHBQC19613, PHBQC12519, PHBQD18790, PHBQC12616, PHBQG09329	
HP LaserJet Pro Printer M402dne	PHB5D00782, PHB5D04714, PHB5F04770, PHB5B18304, PHB5D04713	
Dell OptiPlex 9030 All-In-One	CF73S52	
Dell Ultrasharp 24" Monitor U2414H	1PVZ152, 62VZ152	
Dell OptiPlex 3050 All-In-One	19YWWK2	
Smart Card Reader ACR39	RR374-010362	

Table 1-21. D-Suite 5.5 Voting System Support Equipment

Component	Serial Number	
Dell Monitor KM632	FYNTY12, CKX6Y12, CN-0524N3-72461-59H-6U5U	
Dell Monitor P2414Hb	CN-0524N3-74261-5AH-2DNU, CN-0524N3-74261- 5AH-2DAU	
Dell DVD Multi Recorder GP60NB60	[DVS-Dell-001]	
Dell Latitude E7450 Laptop	30GFH72, 369FH72	
Dell Latitude e3480 Laptop	1VD3NJ2	
Maxim iButton Programmer DS9490R# with DS1402	[DVS-Maxim-001] thru [DVS-Maxim-006]	
APC Smart-UPS SMT1500	3\$1536X06436, 3\$1536X06475, 3\$1536X06461, 3\$1536X06485, 3\$1536X06484, 3\$1536X06322, 3\$1536X07467, 3\$1536X06485, 3\$1536X06272, 3\$1536X06201, 3\$1536X07305, 3\$1504X00395, 3\$1504X00396, 351716X02289, W51530180004, 3\$171X06059	
Dell X1008 Network Switch	4R8XX42, 26SXX42	
Dell X1018 Network Switch	6TN7Y42, 63SXX42	
Enabling Devices Sip and Puff	[DVS-enabling devices-001] - [DVS-enabling devices-002]	
Cyber Acoustics Headphones ACM-70	[DVS-cyber acoustics-001] - [DVS-cyber acoustics-005]	
4-Way Joystick Controller S26	PME QC 1550 12, [DVS-JOY-001], [DVS-JOY-002]	
Enablemart # 88906 Rocker (Paddle) Switch	[DVS-paddle-001]	
Dell PowerConnect 2808 Network Switch	3S2P0Z1	
IOGEAR SDHC/microSDHC 0U51USC410 Card Reader	8632, 8633	
Lexar USB 3.0 Dual-Slot Reader	24020845007435	
Hoodman Steel USB 3.0 UDMA Reader 102015	[DVS-hoodman-001]	
ATI Handset	98862010101-035, 98862010103-075, 00659010100- 046, 98862010100-232, 093015-1-1, 00659010100-035	
ATI-USB Handset	02440010100-011, [DVS-ATIUSB-001], [DVS-ATIUSB-002], B104326-1-4-040, B104326-1-4-035	
ACS PC-Linked Smart Card Reader ACR39U	RR374-006272, RR374-010356, RR374-010365	
Lexar Professional CF Card Reader Workflow CFR1	24050361400108, 24050361401994, 24050361401991, 24050361401990	
CORCOM Filter P/N#: 15EMC1	[DVS-CorcomEMIFilter-001]	
Delta Filter P/N#: 16PDCG5C	[DVS-DeltaEMIFILTER-001]	
Kingston Card Reader FCR-HS4	08738174208132	

1.2 References

- Election Assistance Commission 2005 Voluntary Voting System Guidelines (VVSG) Version 1.0, Volume I, "Voting System Performance Guidelines", and Volume II, "National Certification Testing Guidelines"
- Election Assistance Commission Testing and Certification Program Manual, Version 2.0
- Election Assistance Commission Voting System Test Laboratory Program Manual, Version 2.0
- National Voluntary Laboratory Accreditation Program NIST Handbook 150, 2016 Edition, "NVLAP Procedures and General Requirements (NIST HB 150-2016)", dated July 2016
- National Voluntary Laboratory Accreditation Program NIST Handbook 150-22, 2008 Edition, "Voting System Testing (NIST Handbook 150-22)", dated May 2008
- United States 107th Congress Help America Vote Act (HAVA) of 2002 (Public Law 107-252), dated October 2002
- Pro V&V, Inc. Quality Assurance Manual, Revision 1.0
- Election Assistance Commission "Approval of Voting System Testing Application Package" letter dated May 6, 2016
- EAC Requests for Interpretation (RFI) (listed on www.eac.gov)
- EAC Notices of Clarification (NOC) (listed on www.eac.gov)
- Dominion Voting Systems Technical Data Package (A listing of the D-Suite 5.5-B documents submitted for this test campaign is listed in Section 3.1.2 of this Test Report)

1.3 Terms and Abbreviations

This subsection lists terms and abbreviations relevant to the hardware, the software, or this Test Plan.

"ADA" – Americans with Disabilities Act 1990

"BMD" – Ballot Marking Device

"CM" - Configuration Management

"COTS" - Commercial Off-The-Shelf

"DRE" - Direct Record Electronic

"EAC" - United States Election Assistance Commission

"EMS" - Election Management System

"FCA" - Functional Configuration Audit

"HAVA" - Help America Vote Act

"ICC" - ImageCast Central

"ICE" - ImageCast Evolution

"ICP" - ImageCast Precinct

"ICX" – ImageCast X

"ISO" - International Organization for Standardization

"NOC" - Notice of Clarification

"PCA" - Physical Configuration Audit

"QA" - Quality Assurance

"RFI" – Request for Interpretation

"TDP" - Technical Data Package

"UPS" – Uninterruptible Power Supply

"VSTL" – Voting System Test Laboratory

"VVPAT" - Voter Verifiable Paper Audit Trail

"VVSG" – Voluntary Voting System Guidelines

2.0 CERTIFICATION TEST BACKGROUND

The D-Suite 5.5-B system is a modification of a previously certified system (D-Suite 5.5). Pro V&V performed an evaluation of results from the previous test campaign to determine the scope of testing required for certification of the D-Suite 5.5-B. Based on this evaluation, Pro V&V determined that testing from the previous test campaign would establish the baseline and that the focus of this test campaign would be on the documented system updates.

2.1 Revision History

The table below details the version history of the D-Suite 5.5-B System:

Table 2-1. D-Suite 5.5-B System Revision History

System Version	ystem Version Certification Type Baseline System		Certification Number
D-Suite 5.0	New System	(Original System)	DVS-DemSuite5.0
D-Suite 5.5	Modification	D-Suite 5.0	DVS-DemSuite5.5
D-Suite 5.5-B	Modification	D-Suite 5.5	DVS-DemSuite5.5-B *

^{*}Upon grant of certification by the EAC

2.2 Scope of Testing

The scope of testing focused on the addition of the ImageCast Evolution (ICE) optical ballot hybrid precinct-based scanner and BMD, the ICP2 optical ballot counter, the InoTec HiPro 821 Scanner, and the Canon imageFORMULA DR-M260 Scanner. To evaluate the D-Suite 5.5-B test requirements, the submitted modifications were evaluated against each section of the EAC 2005 VVSG to determine the applicable tests to be performed.

Based on this assessment, it was determined that multiple areas within the EAC 2005 VVSG would be evaluated to encompass the required tests. A breakdown of the areas and associated tests is listed below:

- EAC 2005 VVSG Volume 1, Section 2: Functional Requirements
 - System Integration Testing
 - Functional Configuration Audit (FCA)
 - Physical Configuration Audit (PCA), including System Loads & Hardening
 - Technical Documentation Package (TDP) Review
 - Volume & Stress Testing
 - Accuracy Testing
- EAC 2005 VVSG Volume 1, Section 3: Usability & Accessibility
 - Usability & Accessibility Testing
 - Technical Documentation Package (TDP) Review
- EAC 2005 VVSG Volume 1, Section 4: Hardware Requirements
 - Hardware Testing
 - Technical Documentation Package (TDP) Review
- EAC 2005 VVSG Volume 1, Section 5: Software Requirements
 - Source Code Review, Compliance Build, Trusted Build, and Build Document Review
 - Technical Documentation Package (TDP) Review
 - Functional Configuration Audit (FCA)
- EAC 2005 VVSG Volume 1, Section 7: Security Requirements
 - Security Testing
 - Technical Documentation Package (TDP) Review
 - Functional Configuration Audit (FCA)

2.2.1 Modification Overview

The Dominion Democracy Suite 5.5-B Voting System is a modified voting system configuration that includes upgrades to the components of the D-Suite 5.5 Voting System. Section 2.2.1.1 details changes between this system and the baseline of the Democracy Suite 5.5 Voting System.

To verify the modifications were successfully addressed throughout the test campaign, each modification was tracked and verified to be addressed during the execution of the relevant test area. For example, source code changes were verified during the source code review. Modifications requiring functional test verification were evaluated by executing the standard Accuracy Test, the System Integration Test, or during performance of the FCA. Modifications that were not adequately evaluated during the performance of these tests were subjected to specifically designed test cases. Additionally, Pro V&V functionally verified that any corrected issues from the baseline system were not present in the modified system and that all enhancements implemented did not adversely impact system performance.

2.2.1.1 Detailed List of Changes

General Modifications

- Addition of ImageCast Evolution (ICE), a precinct-level, optical scan, ballot counter (tabulator) designed to perform three major functions: ballot scanning and tabulation, ballot review and second chance voting, and accessible voting and ballot marking. Submitted version: ICE firmware version 5.5.6.5, model number PCOS 410A.
- Addition of InoTec HiPro 821 Scanner as a component for the ImageCast Central Count (ICC). Submitted version: ICC software application version 5.5.32.5, HiPro 821 Scanner driver version 1.2.3.17.
- Addition of Canon imageFORMULA DR-M260 Scanner as a component for the ImageCast Central Count (ICC). Submitted version: ICC software application version 5.5.32.5, DR-M260 Scanner driver version 1.1 SP2.
- Addition of ImageCast Precinct 2 (ICP2) optical ballot counter. The ICP2 is a precinct-based optical scan ballot tabulator that is used in conjunction with ImageCast compatible ballot storage boxes. Submitted version: ICP2 firmware version 5.5.1.8, model number PCOS-330A.

EMS Election Event Designer

Added support for Ballot ID creation by Precinct Portion

ICC

Corrected drop-out of red colored ovals when using the HiPro scanner

ICP

 Added support for the new election file revision number of 0x0307 which increased the field size of the 'Number of Ballots' field in the VIF ELECTION.DVD file from an unsigned short (2 bytes) to an unsigned integer (4 bytes)

<u>ICX</u>

- Corrected discrepancy between Total Ballots Cast and Report Tape after results are deleted manually from the ICX
- Corrected issue where the application was not providing a warning for low paper amount on VVPAT tape

2.2.1.2 ECO Assessment

Since certification of previous versions of D-Suite systems that are relevant to the D-Suite 5.5-B configuration, DVS has implemented various Engineering Change Orders (ECOs), each of which were evaluated and determined to be De Minimis in nature. Although testing was not warranted during implementation of these ECOs, they are either included as part of the D-Suite 5.5-B system test campaign or may be applied to the D-Suite 5.5-B system. A listing of these ECOs, along with a brief description is provided below:

- ECO 100503 Adding a COTS collapsible ballot box to AVL for use with the ICP
- ECO 100521 Added DELL P2419H monitor as a display device for server and client workstations
- ECO 100527 Added DELL Latitude 3490 computer with updated i3-8130U processor (Dual Core, 4MB Cache, 2.2GHz) to DVS PN 190-000061 (a client workstation)
- ECO 100543 Update to the DR-G1130 Scanner LCD Panel User Interface
- ECO 100588 Added new models of VVPAT printer for use with the D-Suite ICX workstation due to previous model becoming commercially unavailable
- ECO 100596 Added DELL Latitude 3400 computer as a client workstation due to the DELL Latitude 3490 computer becoming commercially unavailable for purchase
- ECO 100597 Added DELL PowerEdge R640 computer with new processor and RAM as an AVL to the existing R640 server computer configurations
- ECO 100602 Added DELL Precision 3431 computer in an EMS Express Server and EMS Client Workstation configuration due to the DELL Precision 3430 computer becoming commercially unavailable for purchase
- ECO 100603 Added DELL P2418HT monitor as a display device for ICC HiPro scanner workstation configuration due to the Lenovo 10QXPAR1US monitor becoming commercially unavailable for purchase

Note: The ECOs listed above were approved by the EAC prior to the issue date of this final test report.

2.2.2 Block Diagram

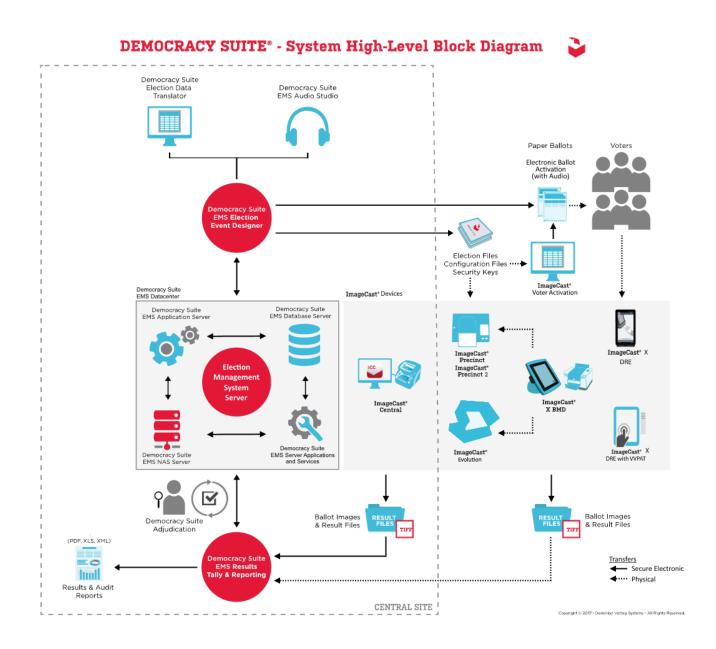


Figure 1-1. D-Suite 5.5-B System Overview

2.2.3 System Limits

The system limits verified to be supported by the D-Suite 5.5-B System during this test campaign or during testing of the baselined system are provided in the table below.

Table 2-2. D-Suite 5.5-B System Limits by Configuration

G1	Configuration Values		T C		
Characteristic	Standard	Express	Limiting Component		
Portrait Ballot Orientation					
Ballot positions	462	462	*22-inch Portrait Ballot		
Precincts in an election	1000	250	Memory		
Contests in an election	1000	250	Memory		
Candidates/Counters in an election	10000	2500	Memory		
Candidates/Counters in a precinct	462	462	*22-inch Portrait Ballot		
Candidates/Counters in a tabulator	10000	2500	Memory		
Ballot Styles in an election	3000	750	Memory		
Contests in a ballot style	156	156	*22-inch Portrait Ballot		
Candidates in a contest	231	231	*22-inch Portrait Ballot (Column Span 3)		
Ballot styles in a precinct	5	5	Memory		
Number of political parties	30	30	No Limitation		
"Vote for" in a contest	30	30	No Limitation		
Supported languages in an election	5	5	Memory		
Number of write-ins	462	462	*22-inch Portrait Ballot		
Land	dscape Ballot	Orientation			
Ballot positions	292	292	*22-inch Landscape Ballot (240 candidates + 24 write-ins + 28 Yes/No choices)		
Precincts in an election	1000	250	Memory		
Contests in an election	1000	250	Memory		
Candidates/Counters in an election	10000	2500	Memory		
Candidates/Counters in a precinct	240	240	*22-inch Ballot		
Candidates/Counters in a tabulator	10000	2500	Memory		
Ballot Styles in an election	3000	750	Memory		
Contests in a ballot style	38	38	*22-inch Landscape Ballot (24 candidacy contests + 14 Propositions)		

Table 2-2. D-Suite 5.5-B System Limits by Configuration (continued)

Characteristic	Configuration Values		Limiting Commonant	
Characteristic	Standard	Express	Limiting Component	
Candidates in a contest	240	240	*22-inch Ballot	
Ballot styles in a precinct	5	5	Memory	
Number of political parties	30	30	Memory	
"Vote for" in a contest	24	24	*22-inch Landscape Ballot	
Supported languages in an election	5	5	Memory	
Number of write-ins	24	24	*22-inch Landscape Ballot	

^{*}The 22-inch Ballot length applies only to hand-marked paper ballots.

2.2.4 Supported Languages

Support for the following languages was verified during this test campaign or during testing of the baselined system:

Table 2-3. D-Suite 5.5-B Supported Languages

Language	ICE	ICP	ICX
Alaska Native	Yes, if using Latin alphabet	Yes	No
Apache	Audio only	Audio only	No
Bengali	Yes	Yes	Yes
Chinese	Yes	Yes	Yes
English	Yes	Yes	Yes
Eskimo	Yes, if using Latin alphabet	Yes	No
Filipino	Yes, if using Latin alphabet	Yes	No
French	Yes	Yes	Yes
Hindi	Yes	Audio only	Yes
Japanese	Yes	Yes	Yes
Jicarilla	Audio only	Audio only	No
Keres	Audio only	Audio only	No
Khmer	Yes	Audio only	No
Korean	Yes	Yes	Yes
Navajo	Audio only	Audio only	No
Seminole	Audio only	Audio only	No
Spanish	Yes	Yes	Yes
Tagalog	No	No	Yes
Thai	Yes	Audio only	Yes
Towa	Audio only	Audio only	No
Ute	Audio only	Audio only	No
Vietnamese	Yes	Yes	Yes
Yuman	Audio only	Audio only	No

Support for all stated languages was verified; however, only English and Spanish language ballots were cast during the performance of functional testing. Additionally, one character based language (Chinese) was tested during System Integration Testing.

For the character based language, the ballot was created by Pro V&V and voted utilizing both paper ballots and ADA voting devices along with all applicable peripherals. The Chinese Language for the ballot was created using a readily available online translation tool. The translated language text was entered into the Election Event Designer Application. A ballot preview was generated in the EED application. The Chinese characters displayed in the ballot preview were compared to the characters generated by the online translation tool, to ensure that the characters matched. The ballots were then generated and printed, and the election loaded onto the tabulators and the BMD units. The Chinese characters displayed on both the printed ballots and displayed on the BMD units were compared to the original Chinese Characters generated by the online translation tool to verify that the characters matched.

2.2.5 Supported Functionality

The D-Suite 5.5-B was verified to support the following voting variations:

- General Election
- Closed Primary
- Open Primary
- Early Voting
- Partisan/Non-Partisan Offices
- Write-In Voting
- Primary Presidential Delegation Nominations
- Split Precincts
- Vote for N of M
- Ballot Rotation
- Provisional or Challenged Ballots

2.2.6 VVSG

The D-Suite 5.5-B Voting System was evaluated against the relevant requirements contained in the EAC 2005 VVSG, Version 1.0.

2.2.7 **RFIs**

There are no RFIs released by the EAC as of the date of this Test Report that pertain to this test campaign that were not in effect at the time of the baseline system certification.

2.2.8 NOCs

There are no NOCs released by the EAC as of the date of this Test Report that pertain to this test campaign that were not in effect at the time of the baseline system certification.

3.0 TEST FINDINGS AND RECOMMENDATION

The D-Suite 5.5-B Voting System was evaluated against the relevant requirements contained in the EAC 2005 VVSG, Volumes I and II. The focus of this test campaign is the addition of the ImageCast Evolution (ICE) optical ballot hybrid precinct-based scanner and BMD, the ICP2 optical ballot counter, the InoTec HiPro 821 Scanner, and the Canon imageFORMULA DR-M260 Scanner. The summary findings and recommendations for each area of testing are provided in the following sections.

3.1 Summary Findings and Recommendation

Summary findings for the System Level Testing (System Integration Testing, Accuracy Test, Volume & Stress Testing, and FCA), Hardware Testing, Usability & Accessibility Testing, Security Testing, and Source Code Review are detailed in the relevant sections of this report. In addition to these areas of testing, a PCA (including System Loads & Hardening), a TDP Review, and a QA & CM System Review were performed, as described below.

3.1.1 Physical Configuration Audit (PCA)

The Physical Configuration Audit (PCA) compares the voting system components submitted for qualification to the manufacturer's technical documentation, and shall include the following activities:

- Establish a configuration baseline of software and hardware to be tested; confirm whether
 manufacturer's documentation is sufficient for the user to install, validate, operate, and
 maintain the voting system
- Verify software conforms to the manufacturer's specifications; inspect all records of
 manufacturer's release control system; if changes have been made to the baseline version,
 verify manufacturer's engineering and test data are for the software version submitted for
 certification
- If the hardware is non-COTS, Pro V&V shall review drawings, specifications, technical
 data, and test data associated with system hardware to establish system hardware baseline
 associated with software baseline
- Review manufacturer's documents of user acceptance test procedures and data against system's functional specifications; resolve any discrepancy or inadequacy in manufacturer's plan or data prior to beginning system integration functional and performance tests

 Subsequent changes to baseline software configuration made during testing, as well as system hardware changes that may produce a change in software operation are subject to re-examination

Summary Findings

During execution of the PCA, the components of the D-Suite 5.5-B were documented by component name, model, serial number, major component, and any other relevant information needed to identify the component. For COTS equipment, every effort was made to verify that the COTS equipment had not been modified for use. Additionally, each technical document submitted in the TDP was recorded by document name, description, document number, revision number, and date of release. At the conclusion of the test campaign, test personnel verified that any changes made to the software, hardware, or documentation during the test process were fully and properly documented.

3.1.2 TDP Review

In order to determine compliance of the modified TDP documents with the EAC 2005 VVSG, a limited TDP review was conducted. This review focused on TDP documents that have been modified since the certification of the baseline system. The review consisted of a compliance review to determine if each regulatory, state, or manufacturer-stated requirement had been met based on the context of each requirement. Results of the review of each document were entered on the TDP Review Checklist and reported to the manufacturer for disposition of any anomalies. This process was ongoing until all anomalies were resolved.

Summary Findings

The submitted TDP was determined to be in compliance with the requirements set forth in the EAC 2005 VVSG. A listing of all documents contained in the D-Suite 5.5-B TDP is provided in Table 3-1.

Table 3-1. TDP Documents

Document Number	Description		
	Adjudication Documents		
2.05	Democracy Suite Adjudication Software Design and Specification	5.5-B::122	
2.08	Democracy Suite Adjudication System Operation Procedures	5.5-B::170	
2.09	Democracy Suite Adjudication System Maintenance Manual	5.5-B::102	
	D-Suite Documents		
2.02	Democracy Suite System Overview	5.5-B::172	
2.06	Democracy Suite System Security Specification	5.5-B::574	
2.07	Democracy Suite System Test and Verification	5.5-B::196	
2.10	Democracy Suite Personnel Deployment and Training Requirements	5.5-B::132	

Table 3-1. TDP Documents (continued)

Document Number	Description	Version	
2.11	Democracy Suite Configuration Management Process	5.5-B::396	
2.12	Democracy Suite Quality Assurance Program	5.5-B::160	
2.13	Democracy Suite System Change Notes	5.5-B::173	
	EMS Documents		
2.03	Democracy Suite EMS Functional Description	5.5-B::383	
2.05	Democracy Suite EMS Software Design and Specification	5.5-B::329	
2.08	Democracy Suite EMS System Operations Procedures	5.5-B::727	
2.09	Democracy Suite EMS System Maintenance Manual	5.5-B::148	
	Democracy Suite EMS System Installation and Configuration Procedure	5.5-B::349	
	ImageCast Central Documents		
2.03	Democracy Suite ImageCast Central Functionality Description	5.5-B::191	
2.05	Democracy Suite ImageCast Central Software Design and Specification	5.5-B::125	
2.08	Democracy Suite ImageCast Central System Operation Procedures	5.5-B::213	
	Democracy Suite ImageCast Central Installation and Configuration Procedure	5.5-B::203	
ImageCast Evolution Documents			
2.03	Democracy Suite ImageCast Evolution Functionality Description	5.5-B::120	
2.04	Democracy Suite ImageCast Evolution System Hardware Specifications	5.5-B::332	
2.05	Democracy Suite ImageCast Evolution Software Design and Specifications	5.5-B::175	
2.08	Democracy Suite ImageCast Evolution System Operation Procedures	5.5-B::241	
2.09	Democracy Suite ImageCast Evolution System Maintenance Manual	5.5-B::165	
	ImageCast Precinct Documents		
2.03	Democracy Suite ImageCast Precinct Functionality Description	5.5-B::182	
2.04	Democracy Suite ImageCast Precinct System Hardware Specification	5.5-B::153	
2.04.1	Democracy suite ImageCast Precinct System Hardware Characteristics	5.5-B::98	
2.05	Democracy Suite ImageCast Precinct Software Design and Specification	5.5-B::155	
2.08	Democracy Suite ImageCast Precinct System Operation Procedures	5.5-B::277	
2.09 Democracy Suite ImageCast Precinct System Maintenance Manual		5.5-B::125	
	ImageCast Precinct2 Documents		

Table 3-1. TDP Documents (continued)

		Version
2.03	Democracy Suite ImageCast Precinct 2 Functionality Description	5.5-B::10
2.04	Democracy Suite ImageCast Precinct 2 System Hardware Specifications	5.5-B-11
2.05	Democracy Suite Imagecast Precinct 2 Software Design and Specifications	5.5-B::16
2.08	Democracy Suite Imagecast Precinct 2 System Operation Procedures	5.5-B::10
2.09	Democracy Suite Imagecast Precinct 2 System Maintenance Manual	5.5-B::9
	ImageCast X Documents	
2.03	Democracy Suite ImageCast X Functionality Description	5.5-B::97
2.05	Democracy Suite ImageCast X Software Design and Specification	5.5-B::98
2.08	Democracy Suite ImageCast X System Operation Procedures	5.5-B::85
	Democracy Suite ImageCast X System Installation and Configuration	5.5-B::87
2.09	Democracy Suite ImageCast X System Maintenance Manual	5.5-B::76
User Guides		
	Democracy Suite ImageCast Adjudication User Guide	5.5-B::141
	Democracy Suite Election Data Translator User Guide	5.5-B::89
	Democracy Suite EMS Audio Studio User Guide	5.5-B::38
	Democracy Suite EMS Election Event Designer User Guide	5.5-B::339
	Democracy Suite EMS Results Tally and Reporting User Guide	5.5-B::145
	Democracy Suite ImageCast Central User Guide	5.5-B::137
	Democracy Suite ImageCast Precinct User Guide	5.5-B::56
	Democracy Suite ImageCast Voter Activation User Guide	5.5-B::53
	Democracy Suite ImageCast X User Guide	5.5-B::252
	Democracy Suite ImageCast Precinct 2 User Guide	5.5-B::6
	Canon imageFORMULA DR-M160II User Manual	
	Canon imageFORMULA DR-M260 User Manual	
	Canon imageFORMULA DR-G1130 DR-G1100 User Manual	
	HiPro User Manual	1.2
Supplementary Documents		
	Common Industry Format for Usability Test Report ImageCast X 5.2 with VVPAT	5.5::1
	Dell Latitude E7450 Owner's Manual	Rev. A00
	SID-15V-Z37-A1R User Manual	Rev. 1.0

Table 3-1. TDP Documents (continued)

Document Number	Description	Version
	SID-21V-Z37-A1R User Manual	Rev. 1.0
	Cyber Acoustics ACM-70B Stereo Headphones Product Sheet	
	Democracy Suite ImageCast C++ Coding Standard	5.5-B::59
	Democracy Suite C# Automated Code Review Process	5.5-B::54
	Dell Latitude E7450/Latitude 7450 Regulatory Compliance Sheet	Rev. A09
	Dell OptiPlex 9020 AIO Regulatory Compliance Sheet	Rev. A09
	Dell OptiPlex 9030 AIO Regulatory Compliance Sheet	Rev. A09
	Dell Networking X-Series Specification Sheet	Ver. 1.9
	Dell OptiPlex 9020 All-in-One Technical Specification Sheet	
	Dell OptiPlex 9030 All-in-One Technical Specification Sheet	
	Dell OptiPlex 3050 All-in-One Technical Specification Sheet	
	Google Java Style Dominion XML	
	Dominion Voting Systems Java Coding Standards	1.0
	Dominion Voting Systems JavaScript Coding Standards	1.0
	ICX Machine Configuration File (MCF) Parameters Settings	5.5-B::31
	Democracy Suite ImageCast Device Configuration Files	5.5-B::105
	Democracy Suite ImageCast Printing and Finishing Specification	5.5-B::99
	Democracy Suite ImageCast Total Results File Format	5.5-B::62
	Democracy Suite ImageCast Election Definition Files	5.5-B::88
	Democracy Suite ImageCast Precinct Extracting Firmware Contents	5.5-B::41
	Democracy Suite ImageCast Precinct Firmware Update Procedure	5.5-B::68
	Democracy Suite ImageCast Precinct Level One (L1) Maintenance Manual	5.5-B::67
	Democracy Suite ImageCast Precinct Technical Guide	5.5-B::57
	Usability Test Report of ImageCast Precinct 5.0 with 36 Participants for VVSG 1.0	5.0::10
	Usability Test Report of ImageCast X 5.0 with 36 Participants for VVSG 1.0	5.0::13
	YEDU.E95462 Uninterruptible Power-supply Equipment Sheet	
	Dell Latitude E7440 Regulatory Compliance Sheet	Rev. A09
	Dell Latitude 3480 Regulatory Compliance Sheet	Rev. A11
	Dell PowerEdge R630 Regulatory Compliance Sheet	Rev. A10
	Dell Precision T1700 MT Regulatory Compliance Sheet	Rev. A09

Table 3-1. TDP Documents (continued)

Document Number	Description	Version
	Dell PowerConnect 2808 Product Safety. EMC, and Environmental Datasheet	
	Dell PowerConnect 2816 Product Safety. EMC, and Environmental Datasheet	
	Smart Pro SM1500 Datasheet	
	APC Smart-UPS 230V Product Information Sheet	
	HP M402dn Datasheet	Rev. 2
	HP M402dne Datasheet	May 2017
	Dell Latitude 3480 Owner's Manual	Rev. A00
	Dell Latitude 3470 Owner's Manual	Rev. A00
	Dell Precision T3420 Owner's Manual	Rev. A00
	aValue HID-21V-BTX-A1R User Manual	Rev. 2.0
	aValue SID-15V-Z37-A1R Data Sheet	
	aValue SID-21V-Z37-A1R Data Sheet	
	APC Installation and Operation Back-UPS Pro BR1000G	10/2014
	APC Smart-UPS SMT1500 Operation Manual	03/2013
	Dell OptiPlex 7440 All-In-One Owner's Manual	Rev. A01
	Dell OptiPlex 3050 All-In-One Owner's Manual	Rev. A01
	Dell P2417H Monitor User's Guide	Rev. A01
	Dell PowerEdge R630 Owner Manual	Rev. A03
	Lexar Pro USB 3 Dual Slot Reader	
	Usability Study of Dominion Voting Systems ImageCast Evolution Versions 4.1.1.1 and 4.6.1.1	1.0.0::37
	Democracy Suite ImageCast Evolution Firmware Installation Procedure	5.5-B::96
	Democracy Suite ImageCast Evolution Level One (L1) Maintenance Manual	5.5-B::134
	Democracy Suite ImageCast Evolution Machine Behavior Settings	5.5-B::96
	Seiko SII RP-D10 Series User's Guide	Jan. 2018
	Dell EMC PowerEdge R640 Installation and Service Manual	Rev. A01
	Dell OptiPlex 7060 Small Form Factor Service Manual	Rev. A00
	Dell Latitude E7470 Owner's Manual	Rev. A02
	APC Operation Manual Smart-UPS 750/1000/1500/2200/3000 VA	
	ACR38x CCID Smart Card Reader Reference Manual	V6.05

Table 3-1. TDP Documents (continued)

Document Number	Description	Version
	ACR39 Series PC-linked Smart Card Readers Reference Manual	V1.04
	Ablenet Single Switch Quickstart Guide	
	The Programing Group High-Integrity C++Coding Standard Manual	Ver. 2.2
	HIC++ Standards Model for C++	9.5.4
	Dominion Voting Voter-verified paper audit trail (VVPAT) Model: VRP3 User Manual Safety Precautions	07 2018
	Democracy Suite ImageCast Precinct 2 Machine Behavior Settings	5.5-B::10
	APC Smart-UPS 1500 Specification Sheet	
	Democracy Suite ImageCast Precinct 2 Extracting Firmware Contents and Verifying SHA256 Values	5.5-B::13
	Democracy Suite ImageCast Precinct 2 Level One (L1) Maintenance Manual	5.5-B::9
	APC Back-UPS BE600M1 User Manual	09/2015
	APC Back-UPS SMT1500C Operation Manual	01/2017
	Avalue HID-21V-BTX FactSheet ()	
	Avalue SID 21V Quick Reference	Feb 2018
	Dell Latitude 3490 Owners Manual	Rev. A01
	Dell OptiPlex 3050 AIO EMC Emissions Compliance Sheet	Rev. A11
	Dell Latitude 3400 Setup and Specification Guide	Rev. A00
	Dell PowerEdge R640 Technical Guide	Rev. A00
	Dell Networking X Series User Guide	Rev. A06
	Dell P2419H Monitor User's Guide	Rev. A05
	DisplayLink DL 125 Product Brief	
	HIC Coding Standard	2.2
	Kingston USB 3.0 High-Speed Media Reader Datasheet	
	Lenovo ThinkCentre TIO24Gen3Touch Monitor User Guide	May 2017
	Dell Optiplex 7050 Tower Owners Manual (A01)	Rev. A01
	Dell Optiplex 7060 Small Form Factor Service Manual	Rev. A00
	Dell Optiplex 7060 Tower Setup and Specifications Guide	Rev. A01
	Dell Precision 3430 Small Form Factor Service Manual	Rev. A00
	Dell Precision 3430 Small Form Factor Setup and Specifications Guide	Rev. A00
	Scamax 8x1 Scanner Brochure	

Table 3-1. TDP Documents (continued)

Document Number	Description	Version
	Tripp Lite SmartPro SM1500RMXL2UTAA Datasheet	
Build Documents		
	Democracy Suite ImageCast Evolution Firmware Build, Prerequisite Setup and Installation	5.5-B::95
	Democracy Suite ImageCast Precinct Firmware Build and Install	5.5-B::90
	Democracy Suite ImageCast X Build	5.5-B::55
	Democracy Suite Windows Build Document	5.5-B::40
	Democracy Suite ImageCast Precinct 2 Build Environment and Prerequisite Setup, Firmware Build and Installation	5.5-B::24

3.1.3 QA & CM System Review

The Dominion Voting Systems Quality and Configuration Management Manuals were reviewed for their fulfillment of Volume I, Sections 8 and 9, and the requirements specified in Volume II, Section 2. The requirements for these sections establish the quality assurance and configuration standards for voting systems to which manufacturers must conform and require voting system manufacturers to implement a quality assurance and configuration management program that is conformant with recognized ISO standards. As part of the review process, the Dominion Voting Systems TDP documents were reviewed to determine if the stated policies were being followed.

Summary Findings

This testing utilized the TDP Review in conjunction with the PCA to determine compliance to the EAC 2005 VVSG requirements and the requirements stated in the Dominion Voting Systems technical documentation. The review of the Quality Assurance and Configuration Management documentation focused on the Dominion Voting Systems' adherence to its stated QA and CM processes. No discrepancies were noted during the reviews.

3.1.4 Source Code Review, Compliance Build, Trusted build, and Build Documentation Review

Pro V&V reviewed the submitted source code to the EAC 2005 VVSG and the manufacturer-submitted coding standards. Prior to initiating the software review, Pro V&V verified that the submitted documentation was sufficient to enable: (1) a review of the source code and (2) Pro V&V to design and conduct tests at every level of the software structure to verify that design specifications and performance guidelines are met.

For the ICE software, a combination of Automated Source Code Review and Manual Source Code Review methods was used to review the source code. For all other components, the submitted source code was compared to the previously certified Democracy Suite 5.5 voting system versions to determine the changes, if any. A combination of Automated Source Code Review and Manual Source Code Review methods was used to review the changes in the source code. In addition, 10% of the source code comments were manually reviewed.

Summary Findings

- <u>Automated Source Code Review</u>: The Automated Source Code Review was performed to review the changes in the source code from the previously certified voting system. No source code issues were found during the Automated Source Code review.
- Manual Source Code Review: The Manual Source Code review was performed on 10% of the comments for compliance to VVSG Volume 1 Section 5.2.7. No source code issues were found during the Manual Source Code review.
- Compliance Build: The compliance build was performed following the compliance review.
 Once the compliance review was performed and the source was deemed stable enough to proceed with testing, the source code and all additional packages were compiled into a Compliance Build.

<u>Trusted Build</u>: The trusted build consisted of inspecting customer submitted source code, COTS, and Third Party software products and combining them to create the executable code. This inspection followed the documented process from the "United States Election Assistance Commission Voting System Testing and Certification Program Manual" Section 5.5 - 5.7. Performance of the trusted build includes the build documentation review. The Trusted Build was performed following the completion of the Functional Configuration Audit.

3.1.5 Security Testing

A complete security evaluation was performed on a previously certified version of the D-Suite System. The submitted modifications were evaluated during the source code review, security tests, and FCA.

To evaluate the integrity of the system, Pro V&V developed specifically designed test cases in an attempt to defeat the access controls and security measures documented in the system TDP as well verifying compliance to EAC RFI 2012-05. During the security testing, the system was inspected for various controls and measures that were in place to meet the objectives of the security standards which included: protection of the critical elements of the voting system; establishing and maintaining controls to minimize errors; protection from intentional manipulation, fraud and malicious mischief; identifying fraudulent or erroneous changes to the voting system; and protecting the secrecy in the voting process.

Summary Findings

As a result of the Security Testing, it was determined that the D-Suite 5.5-B met the requirements of the security review. Any deficiencies encountered during testing were successfully resolved.

3.1.6 System Level Testing

System Level testing was implemented to evaluate the complete system. This testing included all proprietary components and COTS components (software, hardware, and peripherals) in a configuration of the system's intended use. For software system tests, the tests were designed

according to the stated design objective without consideration of its functional specification. The system level hardware and software test cases were prepared independently to assess the response of the hardware and software to a range of conditions. Pro V&V reviewed the manufacturer's program analysis, documentation, and module test case design and evaluated the test cases for each module with respect to flow control parameters and entry/exit data.

System Level Testing included the evaluations of the following test areas FCA, Accuracy Testing, Volume & Stress, and System Integration Testing. Each of these areas is reported in detail in the subsections that follow.

Component Level Testing was implemented during the FCA for each component and subcomponent. During the source code review, compliance builds, and security testing, Pro V&V utilized limited structural-based techniques (white-box testing). Additionally, specification-based techniques (black-box testing) were utilized for the individual software components.

Pro V&V defined the expected result for each test and the ACCEPT/REJECT criteria for certification. If the system performed as expected, the results were accepted. If the system did not perform as expected, an analysis was performed to determine the cause. If needed, the test was repeated in an attempt to reproduce the results. If the failure could be reproduced and the expected results were not met, the system was determined to have failed the test. If the results could not be reproduced, the test continued. Any errors encountered were documented and tracked through resolution.

To verify the modifications were successfully addressed throughout the test campaign, each modification was tracked and verified to be addressed during the execution of the relevant test area. For example, source code changes were verified during the source code review. Modifications requiring functional test verification were evaluated by executing the standard Accuracy Test, the System Integration Test, or during performance of the FCA. Modifications that were not adequately evaluated during the performance of these tests were subjected to specifically designed test cases.

3.1.6.1 Functional Configuration Audit (FCA)

The functional configuration audit encompasses an examination of manufacturer's tests, and the conduct of additional tests, to verify that the system hardware and software perform all the functions described in the manufacturer's documentation submitted in the TDP.

In addition to functioning according to the manufacturer's documentation, tests will be conducted to insure all applicable EAC 2005 VVSG requirements are met.

For this campaign FCA testing included several exhaustive paths applied in concert:

- <u>FCA-VVSG Testing</u>: Each component of the system was evaluated against a standardized test-case suite centered upon requirements stated in the VVSG and administered through a test-management software tool. All applicable tests-cases were performed while any non-applicable test-cases were logged as "n/a" for substantiation. The system operations and functional

capabilities were categorized in the tool as follows by the phase of election activity in which they are required:

- O Pre-voting Capabilities: These functional capabilities are used to prepare the voting system for voting. They include ballot preparation, the preparation of election-specific software (including firmware), the production of ballots, the installation of ballots and ballot counting software (including firmware), and system and equipment tests.
- Voting System Capabilities: These functional capabilities include all operations conducted at the polling place by voters and officials including the generation of status messages.
- O Post-voting Capabilities: These functional capabilities apply after all votes have been cast. They include closing the polling place; obtaining reports by voting machine, polling place, and precinct; tabulation of paper ballots at the central location; accumulation of results from all voting methods; obtaining consolidated reports; and obtaining reports of audit trails.
- <u>FCA-Claims Testing:</u> System user instructions and procedures found in the TDP were followed
 to verify their accuracy and completeness. In addition any functional claims discovered in the
 TDP that were not specifically examined in other areas or that were items of interest were also
 tested.
- FCA-Mapping: Any modified functional paths (buttons, dropdowns, etc.) were mapped by qualified VSTL personnel, to help ensure all functional options had been noted and exercised.
 Any items of interest were examined and/or tested.

All issues (if any) found during these efforts are detailed in Section 3.3. Any issues noted were tracked using an issue tracking software program and issue tracking spreadsheets.

Summary Findings

All functional tests were successfully executed. During execution of the test procedure, it was verified that the D-Suite 5.5-B System successfully completed the system level integration tests with all actual results obtained during test execution matching the expected results.

3.1.6.2 Volume & Stress

The Volume & Stress Tests are utilized to investigate the system's response to conditions that tend to overload the system's capacity to process, store, and report data.

The test parameters focused on the system's stated limits and the ballot logic for areas such as the maximum number of active voting positions, maximum number of ballot styles, maximum candidates, maximum contests, and stated limits within the EMS. This test is utilized to ensure the system could achieve the manufacturer's TDP claims of what the system can support. Testing was performed by exercising multiple election definitions and test cases developed specifically to test for volume and stress conditions of the system being tested.

Summary Findings

During the performance of the Volume and Stress Test, the ICC configured with the Canon DR-M260 scanner encountered a significant number of double feeds when casting 22" ballots. To address the issue Dominion Voting Systems provided a "T" shaped support to provide support for these long ballots, as well as advised that smaller batches of ballots were used when scanning. These changes were documented and addressed the double feed issue and the ICC configured with the Canon DR-M260 scanner successfully completed the Volume and Stress Test. Volume and stress testing was successfully performed on the D-Suite 5.5-B System.

3.1.6.3 Accuracy

The accuracy test ensures that each component of the voting system can each process 1,549,703 consecutive ballot positions correctly within the allowable target error rate. The Accuracy test is designed to test the ability of the system to "capture, record, store, consolidate and report" specific selections and absences of a selection. The required accuracy is defined as an error rate. This rate is the maximum number of errors allowed while processing a specified volume of data. For paper-based voting systems the ballot positions on a paper ballot must be scanned to detect selections for individual candidates and contests and the conversion of those selections detected on the paper ballot converted into digital data.

Summary Findings

The accuracy requirements for the ICE, ICP2, and the ICC units were met by the execution of the standard accuracy test utilizing hand-marked ballots of each ballot length supported by the system, and ballots produced by the ICX BMD, to achieve an accuracy rate greater than 1,549,703 correct ballot positions.

The ICX BMD, ICX DRE, ICP, and the ICX DRE with VVPAT Accuracy test were reused from the Dominion 5.5 EAC Campaign.

3.1.6.4 System Integration

System Integration is a system level test for the integrated operation of both hardware and software. System Integration evaluates the compatibility of the voting system software components or subsystems with one another, and with other components of the voting system environment. This compatibility was determined through functional tests integrating the voting system software with the remainder of the system. During test performance, the system was configured exactly as it would for normal field use. This included connecting all supporting equipment and peripherals including ballot boxes, voting booths (regular and accessible), and any physical security equipment such as locks and ties.

Summary Findings

During System Integration testing, three General Elections and three Primary Elections were successfully exercised on the voting system, as described below:

Three general elections with the following breakdowns:

- General Election GEN-01: A basic election held in 4 precincts, one of which is a split precinct. This election contains 19 contests compiled into 4 ballot styles. 5 of the contests are in all 4 ballot styles. The other 15 contests are split between at least 2 of the precincts with a maximum of 4 different contest spread across the 4 precincts.
- General Election GEN-02: A basic election held in 3 precincts. This election contains 15 contests compiled into 3 ballot styles. 10 of the contests are in all 3 ballot styles with the other five split across the 3 precincts.
- General Election GEN-03: A basic election held in 2 precincts. This election contains 8 contests and compiled into 2 ballot styles. 4 of the contests are in both ballot styles. The other 4 contests are split between the two precincts. This election is designed to functionally test the handling of multiple ballot styles, support for at least three languages including a character-based language, support for common voting variations, and audio support for at least three languages and an ADA binary input device.

Three primary elections with the following breakdowns:

- Primary Election PRIM-01: Open Primary Election in two precincts. This election contained thirty contests compiled into five ballot styles. Each ballot style contains 6 contests.
- Primary Election PRIM-02: Open Primary Election held in two precincts. This election
 contained thirteen contests compiled into three ballot styles. One contest is in all three
 ballot styles; all other contests are independent.
- Primary Election PRIM-03: A basic election held in 2 precincts. This election contains 10 contests and is compiled into 2 ballot styles. 2 of the contests are in both ballot styles. The other 8 contests are split between the two parties' ballots. This Primary Election is designed to functionally test the handling of multiple ballot styles, support for at least three languages including a character-based language, support for common voting variations, and audio support for at least three languages and an ADA binary input device.

The D-Suite 5.5-B System successfully passed the System Integration Test. During execution of the test procedure, it was verified that the D-Suite 5.5-B System successfully completed the system level integration tests with all actual results obtained during test execution matching the expected results.

3.1.7 Usability and Accessibility Testing

Usability & Accessibility testing was performed to evaluate the D-Suite 5.5-B System to the applicable requirements. Testing specifically focused on the modifications implemented since the certification of the baseline system.

Usability was defined generally as a measure of the effectiveness, efficiency, and satisfaction achieved by a specified set of users with a given product in the performance of specified tasks.

The Accessibility portion of testing evaluated the requirements for accessibility. These requirements are intended to address HAVA 301 (a) (3) (B).

During test performance, the D-Suite 5.5-B System was configured as per the Dominion Voting Systems TDP. The configured system was tested to the VVSG 1.0 requirements utilizing TestLink which maintains all applicable test cases. Utilization of both negative and positive inputs were entered into the system and documented into TestLink to allow for traceability and reproducibility. All components were evaluated for applicable requirements in which all deficiencies were documented within TestLink and Mantis for tracking purposes. Regression testing was performed on all identified issues to ensure resolution and compliance to the requirements.

Summary Findings

The D-Suite 5.5-B System successfully met the requirements of the Usability and Accessibility evaluation. Any deficiencies encountered during testing were successfully resolved.

3.1.8 Hardware Testing

The ICX BMD, ICX DRE, ICP, the ICX DRE with Report Printer, and the ICX DRE with VVPAT hardware testing were re-used from the previous certification test campaign (D-Suite 5.5). The components added to the modified system required the full suite of hardware and electrical testing as detailed in the 2005 VVSG. These tests are listed below:

Electrical Tests:

- Electrical Power Disturbance
- Electromagnetic Radiation
- Electrostatic Disruption
- Electromagnetic Susceptibility
- Electrical Fast Transient
- Lightning Surge
- Conducted RF Immunity
- Magnetic Fields Immunity
- Electrical Supply

Environmental Tests:

- Bench Handling
- Vibration
- Low Temperature
- High Temperature

- Humidity
- Temperature Power Variation
- Acoustic

Pro V&V utilized third party testing during the performance of hardware testing. All electrical hardware testing was performed at the TUV SUD Canada, Inc. facility located in Ontario, Canada. All testing at the TUV SUD Canada, Inc. facility was witnessed on-site by Pro V&V personnel. All environmental hardware testing was performed at the NTS Longmont facility located in Longmont, Colorado. All testing at the NTS Longmont facility was witnessed on-site by Pro V&V personnel, with the exception of Temperature Power Variation in which Pro V&V qualified staff executed all testing.

Summary Findings

Electrical Testing was performed on the ICE and ICP2 components of the D-Suite 5.5-B System. The procedures and results for this testing are included in the following TUV SUD Canada, Inc. reports:

- Report File #: 7169005633E-00, presented in Attachment A-1
- Report File #: 7169006118E-00, presented in Attachment A-2

The test results from this testing are summarized below:

Table 3-2. Electrical Hardware Test Results

Standard/Method	Description	Criteria	Class/Level	Result
FCC 15.107	Power Line	Normal		
ICES-003	Conducted	Operation &	Class B	Pass
VVSG Vol. 1 4.1.2.9	Emissions	No Data Loss		
FCC 15.109	Radiated	Normal		
ICES-003	Emissions	Operation &	Class B	Pass
VVSG Vol. 1 4.1.2.9	EIIIISSIOIIS	No Data Loss		
EN61000-4-11	Electrical Power	Normal		
VVSG Vol. 1 4.1.2.5		Operation &	Various	Pass
V VSG VOI. 1 4.1.2.3	Disturbance	No Data Loss		
EN61000-4-4	Electrical Fast Transient	Normal		
VVSG Vol. 1 4.1.2.6		Operation &	±2kV - Mains	Pass
V VSG VOI. 1 4.1.2.0		No Data Loss		
EN61000-4-5		Normal	±2kV Line - Line	
VVSG Vol. 1 4.1.2.7	Lightning Surge	Operation &	±2kV Line -	Pass
V V SG V OI. 1 4.1.2.7		No Data Loss	Ground	
EN61000-4-2	Electrostatic	Normal	±8kV Contact	
VVSG Vol. 1 4.1.2.8		Operation &		Pass
V V SG V 01. 1 4.1.2.8	Disruption	No Data Loss	±15kV Air	
EN61000-4-3	Electromagnetic	Normal	10 V/m,	
VVSG Vol. 1 4.1.2.10	Electromagnetic	Operation &	80 MHz – 1 GHz	Pass
V V SO V VII. 1 4.1.2.10	Susceptibility	No Data Loss	OU WILLE - I GUZ	

Table 3-2. Electrical Hardware Test Results (continued)

Standard/Method	Description	Criteria	Class/Level	Result
EN61000-4-6 VVSG Vol. 1 4.1.2.11	Conducted RF Immunity	Normal Operation & No Data Loss	10 Vrms, 150 kHz – 80 MHz	Pass
EN61000-4-8 VVSG Vol. 1 4.1.2.12	Magnetic Immunity	Normal Operation & No Data Loss	30 A/m	Pass

Environmental Testing was performed on the ICE and ICP2 components of the D-Suite 5.5-B System. The Canon M260 and InoTec HiPro Scanner components were subjected to Temperature-Power Variation Testing only.

The procedures and results for this testing are included in the following NTS Test reports:

- Test Report No. PR094223, presented in Attachment A-3 (*ICE*)
- Test Report No. PR097523, presented in Attachment A-4 (*InoTec HiPro Scanner and ICP2*)

The test results from this testing are summarized below:

Table 3-3. Environmental Hardware Test Results

Standard/Method	Description	Criteria	Result
MIL-STD-810D, 516.3, I-3.8 VVSG Vol. 1 4.1.2.14, VVSG Vol. 2 4.6.2	Shock – Bench Handling	Normal Operation & No Data Loss	Pass
MIL-STD-810D, 514.3, I-3.2.1 VVSG Vol. 1 4.1.2.14, VVSG Vol 2 4.6.3	Vibration - Basic Transportation	Normal Operation & No Data Loss	Pass
MIL-STD-810D, 502.2, II-3 VVSG Vol 1 4.1.2.14, VVSG Vol 2 4.6.4	Low Temperature - Storage	Normal Operation & No Data Loss	Pass
MIL-STD-810D, 501.2, I-3.2 VVSG Vol 1 4.1.2.14, VVSG Vol 2 4.6.5	High Temperature - Storage	Normal Operation & No Data Loss	Pass
MIL-STD-810D, 507.2, I-3.2 VVSG Vol 1 4.1.2.14, VVSG Vol 2 4.6.5	Humidity – Hot/Humid	Normal Operation & No Data Loss	Pass
MIL-STD-810D, 501.2/502.2 VVSG Vol 1 4.1.2.13, 4.3.3, VVSG Vol 2 4.7.1	Reliability, Temp-Power Variation Testing	Normal Operation & No Data Loss	Pass
VVSG Vol. 1 3.1.7.1, 3.2.2.2 (c)	Acoustic Noise Level Test	Normal Operation & No Data Loss	Pass
VVSG Vol. 1 4.1.2.4	Electrical Supply	Normal Operation & No Data Loss	Pass
VVSG Vol. 1 4.7.2	Maintainability	Ease of Maintenance	Pass

3.2 Anomalies and Resolutions

When a result is encountered during test performance that deviates from what is standard or expected, a root cause analysis is performed. Pro V&V considers it an anomaly if no root cause can be determined. In instances in which a root cause is established, the results are then considered deficiencies.

Summary Findings

There were no anomalies encountered during this test campaign.

3.3 Deficiencies and Resolutions

Any violation of the specified requirement or a result encountered during test performance that deviates from what is standard or expected in which a root cause is established was considered to be a deficiency. Any deficiencies encountered were logged throughout the test campaign into the Pro V&V tracking system (Mantis) for disposition and resolution. In each instance, if applicable, the resolutions were verified to be resolved through all required means of testing (regression testing, source code review, and TDP update) as needed. Table 3.4 details the noted deficiencies.

Table 3-4. Noted Deficiencies

ID#	Test Category	Deficiency	Resolution
476	Volume and Stress	A significant number of double feeds occurred while scanning 22" ballots on the ICC configured with the Canon DR-M260 scanner.	Dominion supplied a "T" shaped support to provide support for long ballots, as well as advised that smaller batch sizes be used when scanning.
477	System Loads and Hardening	An error occurred when restarting an ICP2 unit after installing the 5.5.1.1 firmware on the unit. Running the installation process a second time addresses the issue.	
479	General	Using the ATI to vote a ballot caused the ICX application ver. 5.5.13.2 to crash and restart.	This issue was caused by the incorrect build resources being supplied to the VSTL. The correct build resources were supplied and the ICX application version 5.5.13.2 was rebuilt.

4.0 RECOMMENDATION FOR CERTIFICATION

The D-Suite 5.5-B Voting System, as presented for testing, successfully met the requirements set forth for voting systems in the U.S. Election Assistance Commission (EAC) 2005 Voluntary Voting System Guidelines (VVSG), Version 1.0. Additionally, Pro V&V, Inc. has determined

that the D-Suite 5.5-B functioned as a complete system during System Integration Testing. Based on the test findings, Pro V&V recommends the EAC grant the D-Suite 5.5-B System, as identified in Tables 4-1 through 4-29, certification to the EAC 2005 VVSG.

Table 4-1. Democracy Suite 5.5-B EMS Software Component Descriptions

C - 64	¥7	T21	Configu	ıration
Software	Version	Filename	Standard	Express
EMS Election Event Designer (EED)	5.5.32.4	setup.exe: EED_FED_CERT_Setup_x64.msi	X	X
EMS Results Tally and Reporting (RTR)	5.5.32.4	setup.exe: RTR_FED_CERT_Setup_x64.msi	X	X
EMS Application Server	5.5.32.4	setup.exe: APPS_FED_CERT_Setup_x64.ms i	X	X
EMS File System Service (FSS)	5.5.32.4	setup.exe: FSSSetup.msi	X	X
EMS Audio Studio (AS)	5.5.32.4	setup.exe: EMSAudioStudioSetup.msi	X	X
EMS Data Center Manager (DCM)	5.5.32.4	DemocracySuiteEMS_DCM.exe	X	X
EMS Election Data Translator (EDT)	5.5.32.4	setup.exe: EDTSetup_x86.msi EDTSetup_x64.msi	X	X
ImageCast Voter Activation (ICVA)	5.5.32.4	setup.exe: ICVASetup.msi	X	X
EMS Adjudication (Adj.)	5.5.32.1	DVS ImageCast Adjudication Client Setup.msi	X	X
EMS Adjudication Service	5.5.32.1	DVS Adjudication Services Setup.msi	X	X
Smart Card Helper Service	5.5.32.4	setup.exe: SmartCardServiceSetup.msi	X	X

Table 4-2. Democracy Suite 5.5-B ImageCast Precinct Software Component Descriptions

Firmware/Software	Version	Filename
Election Firmware	5.5.31.1	cf2xx.sig
Firmware Updater	5.5.31.1	firmUp.enc
Firmware Extractor	5.5.31.1	FirmwareExtract.enc
Kernel (uClinux)	5.5.31.1	image.bin.gz
Boot Loader (COLILO)	20040221	colilo.bin
Asymmetric Key Generator	5.5.31.1	Keygen.enc
Asymmetric Key Exchange Utility	5.5.31.1	KeyExchange.enc
Firmware Extractor (Uses Technician Key)	5.5.31.1	TechExtract.enc

Table 4-3. Democracy Suite 5.5-B ImageCast Central Software Component Descriptions

Firmware/Software	Version	Filename
ImageCast Central Application	5.5.32.5	ICCSetup.exe

Table 4-4. Democracy Suite 5.5-B ImageCast X Software Component Descriptions

Firmware/Software	Version	Filename
ICX Application	5.5.13.2	ICX.apk

Table 4-5. Democracy Suite 5.5-B ImageCast Precinct 2 Software Component Descriptions

Firmware/Software	Version	Filename
ICP2 Application	5.5.1.8	dvs-release-image-icp2-5.5.1.8.vhd.7z
ICP2 Application (for units with 2 GB RAM)	5.5.1.8	dvs-release-image-icp2-2G-5.5.1.8.vhd.7z
ICP2 Update Card	5.5.1.8	icp2-update-5.5.1.8

Table 4-6. Democracy Suite 5.5-B ImageCast Evolution Software Component Descriptions

Firmware/Software	Version	Filename
Voting Machine	5.5.6.5	GApplication-5.5.6.5.vhd.7z
Election Application	ion 5.5.6.5 dvs	
Linux Kernel	2.6.30.9-dvs-36	uImage
Linux Device File	1.6	mpc8347dvs.dtb
Root File System	5.0.31	rfs
Ram Disk	1.0.2	initrd.img
Motherboard FPGA	1.1.5	ice2_mc_p1.bit
Scanner Board FPGA	1.1.2	ice2_scb_p2.bit
Logger Controller	2.0.2	logger.bin
Power Controller	3.0.5	power.bin
Boot Loader	1.3.4.63	u-boot.bin
Integrated Printer	4.1.6	integratedPrinter.hex, printerFont.hex
Boot Startup Logo	6.0.0	logo_platform.bmp
Linux Startup Logo	6.0.0	logo_os.bmp
Application Startup Logo	6.0.0	application_startup_logo.bmp
Application Verification Logo	6.0.0	logo_application_verification.bmp
Ram Disk Verification Logo	6.0.0	logo_ramdisk_verification.bmp

Table 4-6. Democracy Suite 5.5-B ImageCast Evolution Software Component Descriptions (continued)

Firmware/Software	Version	Filename
Linux Tree Verification Logo	6.0.0	logo_os_tree_verification.bmp
Linux Verification Logo	6.0.0	logo_os_verification.bmp
RFS Verification Logo	6.0.0	logo_rfs_verification.bmp

Table 4-7. Democracy Suite 5.5-B EMS Client/Server Software Component Descriptions

Firmware/Software	Version	Filename	Configuration	
rifiliware/Software	version	Filename	Standard	Express
Microsoft Windows Server	2012 R2 Standard	Physical Media from Microsoft	X	
Microsoft Windows	10 Professional	Physical Media from Microsoft	X	X
.NET Framework	3.5	Physical Media from Microsoft	X	X
Microsoft Visual J#	2.0	vjredist64.exe vjredist.exe	X	X
Microsoft Visual C++ 2013 Redistributable	2013	vcredist_x64.exe vcredist_x86.exe	X	X
Microsoft Visual C++ 2015 Redistributable	2015	vc_redist.x64.exe vc_redist.x86.exe	X	X
Java Runtime Environment	7u80	jre-7u80-windows-x64.exe jre-7u80-windows-i586.exe	X	X
Java Runtime Environment	8u144	jre-8u144-windows-x64.exe jre-8u144-windows-i586.exe	X	X
Microsoft SQL Server 2016 Standard	2016 Standard	Physical Media from Microsoft	X	
Microsoft SQL Server 2016 Service Pack 1	2016 SP1	SQLServer2016SP1- KB3182545-x64-ENU.exe	X	
Microsoft SQL Server 2016 SP1 Express	2016 SP1	SQLEXPRADV_x64_ENU.exe		X
Cepstral Voices	6.2.3.801	Allison (English): Cepstral_Allison_windows_6.2. 3.801.exe Alejandra (Spanish): Cepstral_Alejandra_windows_6 .2.3.801.exe	X	X
Arial Narrow Fonts	2.37a	ARIALN.TTF ARIALNB.TTF ARIALNBI.TTF ARIALNI.TTF	X	X
Maxim iButton Driver	4.05	install_1_wire_drivers_x86_v4 05.msi install_1_wire_drivers_x64_v4 05.msi	X	X

Table 4-7. Democracy Suite 5.5-B EMS Client/Server Software Component Descriptions (continued)

Firmware/Software	Version	Filename	Configuration	
Filliware/Software	Version	riiename	Standard	Express
Adobe Reader DC	AcrobatDC	AcroRdrDC1501020060_en_U S.exe	X	X
Microsoft Access Database Engine	2010	AccessDatabaseEngine.exe AccessDatabaseEngine_x64.ex e	X	X
Open XML SDK 2.0 for Microsoft Office	2.0	OpenXMLSDKv2.msi	X	X

Table 4-8. Democracy Suite 5.5-B EMS Software Platform Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
Infragistics NetAdvantage	2011	NetAdvantage_WinForms_20111.msi
Win Forms 2011.1	Vol.1	1 total da vanta go_ vv ini orinis_20111.inisi
Infragistics NetAdvantage WPF 2012.1	2012 Vol.1	NetAdvantage_WPF_20121.msi
TX Text Control Library for .NET	16.0	TXText Control.NET for Windows Forms 16.0.exe
SOX	14.3.1	sox.exe, libgomp-1.dll, pthreadgc2.dll, zlib1.dll
NLog	1.0.0.505	NLog.dll
iTextSharp	5.0.5	itextsharp.dll
OpenSSL	1.0.2k & 2.0.14 FIPS	openssl.exe, libeay32.dll, ssleay32.dll
SQLite	1.0.103.0	System.Data.SQLite.DLL (32-bit and 64-bit)
Lame	3.99.4	lame.exe
Speex	1.0.4	speexdec.exe and speexenc.exe
Ghostscript	9.04	gsdll32.dll (32-bit and 64-bit)
One Wire API for .NET	4.0.2.0	OneWireAPI.NET.dll
Avalon-framework-cvs- 20020806	20020806	avalon-framework-cvs-20020806.jar
Batik	0.20-5	batik.jar
Fop	0.20-5	fop.jar
Microsoft Visual J# 2.0 Redistributable Package- Second Edition(x64)	2.0	vjc.dll, vjsjbc.dll, vjslibcw.dll, vjsnativ.dll, vjssupuilib.dll, vjsvwaux.dll
Entity framework	6.1.3	EntityFramework.dll
Spreadsheetlight	3.4.3	SpreadsheetLight.dll, SpreadsheetLight.xml
Open XML SDK 2.0 For Microsoft Office	2.0.5022.0	DocumentFormat.OpenXml.dll, DocumentFormat.OpenXml.xml

Table 4-9. Democracy Suite 5.5-B ImageCast Precinct Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
Zlib	1.2.3	Zlib-1.2.3.tar.gz

Table 4-10. Democracy Suite 5.5-B ImageCast Precinct 2 Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
acl	2.2.52	acl-2.2.52.src.tar.gz
attr	2.4.47	attr-2.4.47.src.tar.gz
avahi	0.6.32	avahi-0.6.32.tar.gz
bash	4.3.30	bash-4.3.30.tar.gz
bash-completion	2.4	bash-completion-2.4.tar.xz
busybox	1.24.1	busybox-1.24.1.tar.bz2
bzip2	1.0.6	bzip2-1.0.6.tar.gz
coreutils	8.25	coreutils-8.25.tar.xz
cryptodev-linux	1.8	cryptodev-linux-1.8.tar.gz
cups	2.1.4	cups-2.1.4-source.tar.gz
db	6.0.35	db-6.0.35.tar.gz
dbus	1.10.10	dbus-1.10.10.tar.gz
dbus-glib	0.106	dbus-glib-0.106.tar.gz
dbus-test	1.10.10	dbus-1.10.10.tar.gz
depmodwrapper-cross	1	morty.tar.gz
e2fsprogs	1.43	e2fsprogs.git.tar.gz
expat	2.2.0	expat-2.2.0.tar.bz2
fontconfig	2.12.1	fontconfig-2.12.1.tar.gz
freetype	2.6.5	freetype-2.6.5.tar.bz2
gawk	4.1.3	gawk-4.1.3.tar.gz
gcc-runtime	6.2.0	gcc-6.2.0.tar.bz2
gettext	0.19.8.1	gettext-0.19.8.1.tar.gz
glib-2.0	2.48.2	glib-2.48.2.tar.xz
glibc	2.24	git2_sourceware.org.git.glibc.git.tar.gz

Table 4-10. Democracy Suite 5.5-B ImageCast Precinct 2 Unmodified COTS Component Descriptions (continued)

Firmware/Software	Version	Filename
glibc-initial	2.24	git2_sourceware.org.git.glibc.git.tar.gz
glibc-locale	2.24	git2_sourceware.org.git.glibc.git.tar.gz
gmp	6.1.1	gmp-6.1.1.tar.bz2
gnutls	3.5.3	gnutls-3.5.3.tar.xz
gobject-introspection	1.48.0	gobject-introspection-1.48.0.tar.xz
grep	2.25	grep-2.25.tar.xz
icu	57.1	icu4c-57_1-src.tgz
imx-gpu-viv	6.2.2.p0-aarch32	imx-gpu-viv-6.2.2.p0-aarch32.bin
kbd	2.0.3	kbd-2.0.3.tar.xz
kernel-module-imx-gpu-viv	6.2.2.p0	kernel-module-imx-gpu-viv- 6.2.2.p0.tar.gz
kmod	23+gitAUTOINC +65a885df5f	git2_git.kernel.org.pub.scm.utils.kernel. kmod.kmod.git.tar.gz
libcap	2.25	libcap-2.25.tar.xz
libegroup	0.41	libcgroup-0.41.tar.bz2
libcheck	0.10.0	check-0.10.0.tar.gz
libdaemon	0.14	libdaemon-0.14.tar.gz
libdrm	2.4.70	libdrm-2.4.70.tar.bz2
libevdev	1.5.2	libevdev-1.5.2.tar.xz
libffi	3.2.1	libffi-3.2.1.tar.gz
libgcc	6.2.0	libgcc-5-dev_5.4.0- 6ubuntu1~16.04.10_amd64.deb
libgcc-initial	6.2.0	libgcc-5-dev_5.4.0- 6ubuntu1~16.04.10_amd64.deb
libidn	1.33	libidn-1.33.tar.gz
libinput	1.8.4	libinput-1.8.4.tar.xz
libjpeg-turbo	1.5.0	libjpeg-turbo-1.5.0.tar.gz
libnss-mdns	0.1	nss-mdns-0.10.tar.gz
libpcap	1.7.4	libpcap-1.7.4.tar.gz
libpciaccess	0.13.4	libpciaccess-0.13.4.tar.bz2
libpcre	8.39	libpcre32-3_2%3a8.38-3.1_amd64.deb
libpng	1.6.24	libpng-1.6.24.tar.xz
libpthread-stubs	0.3	libpthread-stubs-0.3.tar.bz2

Table 4-10. Democracy Suite 5.5-B ImageCast Precinct 2 Unmodified COTS Component Descriptions (continued)

Firmware/Software	Version	Filename
libtool-cross	2.4.6	libtool-2.4.6.tar.gz
libusb1	1.0.20	libusb-1.0.20.tar.bz2
libusb-compat	0.1.5	libusb-compat-0.1.5.tar.bz2
libxkbcommon	0.6.1	libxkbcommon-0.6.1.tar.xz
libxml2	2.9.4	libxml2-2.9.4.tar.gz
linux-libc-headers	4.9	linux-4.9.tar.xz
log4cplus	1.2.0	log4cplus-1.2.0.tar.gz
m4	1.4.17	m4-1.4.17.tar.gz
mesa	12.0.1	mesa-12.0.1.tar.xz
mtdev	1.1.5	mtdev-1.1.5.tar.bz2
nettle	3.2	nettle-3.2.tar.gz
openssl	1.0.2k	openssl-1.0.2k.tar.gz
openssl-fips	2.0.10	openssl-fips-2.0.10.tar.gz
opkg-utils	0.3.2+gitAUTOI NC+3ffe ce9bf1	opkg-0.3.3.tar.gz
pkgconfig	0.29.1+gitAUTO INC+87152c05b e	git2_anongit.freedesktop.org.pkg- config.tar.gz
ppp	2.4.7	ppp-2.4.7.tar.gz
procps	3.3.12	procps-ng-3.3.12.tar.xz
qtbase	5.9.6+gitAUTOI NC+f4c2fcc052	qtbase- 5.9.6+gitAUTOINC+9c50112304.tar.gz
qtdeclarative	5.9.6+gitAUTOI NC+dfb e918537	qtdeclarative- 5.9.6+gitAUTOINC+283a900c4e.tar.gz
qtgraphicaleffects	5.9.6+gitAUTOIN C+3d317f1bb0	qtgraphicaleffects- 5.9.6+gitAUTOINC+f61dcaa5e5.tar.gz
qtquickcontrols2	5.9.6+gitAUTOI NC+c51 eea8870	qtquickcontrols2- 5.9.6+gitAUTOINC+c48b314ede.tar.gz
qtquickcontrols	5.9.6+gitAUTOI NC+f050a32a43	qtquickcontrols- 5.9.6+gitAUTOINC+ca6bba7163.tar.gz
qtsvg	5.9.6+gitAUTOI NC+dec74295e8	qtsvg- 5.9.6+gitAUTOINC+7a28db8f5b.tar.gz
qtxmlpatterns	5.9.6+gitAUTOI NC+c7c5681004	qtxmlpatterns- 5.9.6+gitAUTOINC+4dcae15a5a.tar.gz
quazip	0.7.3	quazip-0.7.3.tar.gz
readline	6.3	readline-6.3.tar.gz
run-postinsts	1	morty.tar.gz

Table 4-10. Democracy Suite 5.5-B ImageCast Precinct 2 Unmodified COTS Component Descriptions (continued)

Firmware/Software	Version	Filename
sed	4.2.2	sed-4.2.2.tar.gz
shadow	4.2.1	shadow-4.2.1.tar.xz
shadow-securetty	4.2.1	shadow-4.2.1.tar.xz
sqlite3	3.14.1	sqlite-autoconf-3140100.tar.gz
systemd	230+gitAUTOIN C+3a74d4fc90	git2_github.com.systemd.systemd.git.ta r.gz
tcl	8.6.6	tcl8.6.6-src.tar.gz
tslib	1.1	tslib-1.1.tar.xz
tzdata	2017a	tzdata2017a.tar.gz
usb-modeswitch	2.2.0	usb-modeswitch-2.2.0.tar.bz2
usb-modeswitch- data	20140529	usb-modeswitch-data-20140529.tar.bz2
util-linux	2.28.1	util-linux-2.28.1.tar.xz
util-macros	1.19.0	util-macros-1.19.0.tar.gz
XZ	5.2.2	xz-5.2.2.tar.gz
zbar	0.1	zbar-0.10.tar.bz2
zlib	1.2.8	zlib-1.2.8.tar.xz
flac	1.3.1	flac-1.3.1.tar.xz
gst-plugins-base	1.10.4	gst-plugins-base-1.10.4.tar.xz
gst-plugins-good	1.10.4	gst-plugins-good-1.10.4.tar.xz
gstreamer	1.10.4	gstreamer-1.10.4.tar.xz
harfbuzz	1.3.0	harfbuzz-1.3.0.tar.bz2
libgudev	230	libgudev-230.tar.xz
libical	2.0.0	libical-2.0.0.tar.gz
libogg	1.3.2	libogg-1.3.2.tar.xz
libsamplerate	0.1.8	libsamplerate-0.1.8.tar.gz
libsndfile	1.0.27	libsndfile-1.0.27.tar.gz
libvorbis	1.3.5	libvorbis-1.3.5.tar.xz
speex	1.2rc2	speex-1.2rc2.tar.gz
speexdsp	1.2rc3	speexdsp-1.2rc3.tar.gz
taglib	1.9.1	taglib-1.9.1.tar.gz
qtmultimedia	5.9.6+gitAUTOI NC+52f5785cfa	qtmultimedia- 5.9.6+gitAUTOINC+52f5785cfa.tar.gz

Table 4-11. Democracy Suite 5.5-B ImageCast Evolution Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
BusyBox	1.20.2	busybox-1.20.2.tar.bz2
e2fsprogs	1.42.4	e2fsprogs-1.42.4.tar.gz
Expat XML Parser	2.1.0	expat-2.1.0.tar.gz
fontconfig	2.9.0	fontconfig-2.9.0.tar.gz
Freetype	2.4.9	freetype-2.4.9.tar.bz2
I2C Tools for Linux	3.1.0	i2c-tools-3.1.0.tar.bz2
JPEG library	8d	jpegsrc.v8d.tar.gz
libogg	1.3.0	libogg-1.3.0.tar.gz
libPNG	1.5.10	libpng-1.5.10.tar.gz
libusb	1.0.8	libusb-1.0.8.tar.bz2
libusb-compat	0.1.3	libusb-compat-0.1.3.tar.bz2
log4cplus	1.0.4.1	log4cplus-1.0.4.1.tar.bz2
openssl	1.0.2k	openssl-1.0.2k.tar.gz
openssl-fips	2.0.10	openssl-fips-2.0.10.tar.gz
PPP	2.4.5	ppp-2.4.5.tar.gz
quazip	0.5	quazip-0.5.tar.gz
Qt Everywhere Linux	4.7.3	qt-everywhere-opensource-src- 4.7.3.tar.gz
skell	1.19	skell-1.19.tar.gz
SoundTouch	1.6.0	soundtouch-1.6.0.tar.gz
speex	1.2rc1	speex-1.2rc1.tar.gz
SQLite	3.7.13	sqlite-autoconf-3071300.tar.gz
Sysfs Utilities	2.1.0	sysfsutils-2.1.0.tar.gz
TIFF library	4.0.1	tiff-4.0.1.tar.gz
timezone	2012b	tzcode2012b.tar.gz
USB ModeSwitch	1.2.4	usb-modeswitch-1.2.4.tar.bz2
zlib	1.2.7	zlib-1.2.7.tar.bz2

Table 4-12. Democracy Suite 5.5-B ImageCast X Unmodified COTS Component Descriptions

Firmware/Software	Version	Filename
		ARM: com.google.android.tts_3.11.12-
Google Text-to-Speech	3.11.12	210311121_minAPI19(armeabi-v7a)(nodpi).apk
Engine	3.11.12	x86: com.google.android.tts_3.11.12-
		210311123_minAPI15(x86)(nodpi).apk
ICX Prime Android	0405	0405_5.1.1-01.12_user_android_x86.iso
5.1.1 Image	0403	0403_3.1.1-01.12_use1_android_x60.180
ICX Classic Android	0.0.98	but t and 64 ata DCV19 V0 0 00 zin
4.4.4 Image	0.0.98	byt_t_crv2_64-ota-BCX18-V0.0.98.zip

Table 4-13. Democracy Suite 5.5-B ImageCast Central Software Build Library Source Code (Unmodified COTS)

Firmware/Software	Version	Filename
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz

Table 4-14. Democracy Suite 5.5-B ImageCast Central Runtime Software Components (Unmodified COTS)

Firmware/Software	Version	Filename
1-Wire Driver (x86)	4.05	install_1_wire_drivers_x86_v405.msi
1-Wire Driver (x64)	4.05	install_1_wire_drivers_x64_v405.msi
Canon DR-G1130 TWAIN Driver	1.2 SP6	G1130_DRIT_V12SP6.exe
Canon DR-M160II TWAIN Driver	1.2 SP6	M160II_DRIT_V12SP6.exe
Visual C++ 2013 Redistributable (x86)	12.0.30501	vcredist_x86.exe
InoTec HiPro 821 TWAIN Driver	1.2.3.17	TwainSetup-ScamaxUSB3.exe
Canon DR-M260 TWAIN Driver	1.1 SP2	M260_DRIT_V11SP2.zip

Table 4-15. Democracy Suite 5.5-B ImageCast Precinct Modified COTS Software Component Descriptions

Firmware/Software	Version	Filename
uClinux	20070130	uClinux-dist-20070130.tar.gz
COLILO Bootloader	20040221	Colilo20040221.tar.gz

Table 4-16. Democracy Suite 5.5-B ImageCast Precinct 2 Modified COTS Software Component Descriptions

Firmware/Software	Version	Filename
Kernel	4.9.11	zImage
U-BOOT	2017.03	u-boot.bin

Table 4-17. Democracy Suite 5.5-B ImageCast Evolution Modified COTS Software Component Descriptions

Firmware/Software	Version	Filename
Kernel	2.6.30	uImage
U-BOOT	1.3.4	u-boot.bin

Table 4-18. Democracy Suite 5.5-B ImageCast X Modified COTS Software Component Descriptions

Firmware/Software	Version	Filename
Zxing Barcode Scanner	4.7.5	BS-4.7.5.zip
SoundTouch	1.9.2	Soundtouch-1.9.2.tar.gz

Table 4-19. Democracy Suite 5.5-B EMS Software Build Environment Component Descriptions

Firmware/Software	Version	Filename
Windows 10 Professional	10 Professional	Physical Media from Microsoft
.NET Framework 3.5	3.5	Physical Media from Microsoft
Internet Information Server (IIS)	10.0	Physical Media from Microsoft
7-Zip	9.20 (64 Bit)	7z920-x64.msi
Visual Studio 2015 Professional with Update 3	2015 Update 3	en_visual_studio_professional_2015_wi th_update_3_x86_x64_web_installer_8 922978.exe
.NetDiscUtils	0.10	DiscUtilsBin-0.10.zip
Infragistics NetAdvantage Win Forms 2011.1	2011.1	NetAdvantage_WinForms_20111.msi
Infragistics Net Advantage – WPF 2012.1	2012.1	NetAdvantage_WPF_20121.msi
TX Text Control 16.0.NET	16	TX Text Control.NET for Windows Forms 16.0.exe
Speex	1.0.4	speex_win32_1.0.4_setup.exe
Microsoft Visual J#	2.0	vjredist64.exe
iTextSharp	5.0.5	itextsharp-5.0.5-dll.zip

Table 4-19. Democracy Suite 5.5-B EMS Software Build Environment Component Descriptions (continued)

Firmware/Software	Version	Filename
Ghostscript	9.0.4	gs904w32.exe, gs904w64.exe
Nlog	1.0.0.505	NLog-1.0-Refresh-bin.zip
OneWireAPI.NET	4.0	1-wiresdkver400_beta2.zip
Lame	3.99.4	lame3.99.4-20120130.zip
Sox	14.3.1	sox-14.3.1-win32.zip
Avalon Framework	20020806	avalon-framework-cvs-20020806.jar.zip
Fop	0.20-5	fop-0.20.5.jar
Batik	0.20-5	batik-1.5-fop-0.20-5.jar
SQLite	1.0.103.0	sqlite-netFx46-setup-bundle-x64-2015- 1.0.103.0.exe
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
Strawberry Perl	5.24.1.1	strawberry-perl-5.24.1.1-64bit.msi
Patch	2.5.9-7	patch-2.5.9-7-bin.zip
ISOnewspaper	30.4	ISOnewspaper30v4_gr.icc.zip
Ogg Vorbis Encoder	2.88	oggenc2.88-1.3.5-generic.zip
Ogg Vorbis Encoder	1.10.1	oggdecV1.10.1.zip
Prism Mvvm	1.1.1	prism.mvvm.1.1.1.nupkg
Bitmiracle.libtiff.net	2.4.560	Bitmiracle.libtiff.net.2.4.560.nupkg
Prism	4.0.0	prism.4.0.0.nupkg
Prism.UnityExtensions	4.0.0	prism.unityextensions.4.0.0.nupkg
PDF Printing	2.9.5.2	PDFPrinting.zip
Entity Framework	6.1.3.net45	entityframework.6.1.3.nupkg
WiX	3.10	Wix310.exe
Spreadsheet Light	3.4.3	spreadsheetlight.3.4.3.nupkg
Open XML SDK 2.0 for Microsoft Office	2.0	OpenXMLSDKv2.msi
Adobe Reader DC	AcrobatDC	AcroRdrDC1501020060_en_US.exe
Arial Narrow Fonts	2.37a	ArialNarrowFonts.zip
SSH.NET	2016.1.0	SSH.NET-2016.1.0-bin.zip
SSMS	14.0.17119.0	SSMS-Setup-ENU.exe
TwainDSM	2.3.0	Twaindsm-2.3.0.win.bin

Table 4-20. Democracy Suite 5.5-B ICC Software Build Environment Component Descriptions

Firmware/Software	Version	Filename
NASM Assembler	2.12.02	nasm-2.12.02-win32.zip
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
CSC3-2010	N/A	CSC3-2010.crl
tss-ca-g2	N/A	tss-ca-g2.crl

Table 4-21. Democracy Suite 5.5-B Adjudication Software Build Environment Component Descriptions

Firmware/Software	Version	Filename
Microsoft Enterprise Library	5.0	Enterprise Library 5.0.msi
Microsoft Prism	4.0.0	Prism.4.0.0.nupkg
Microsoft Identity Foundation SDK	4.0	WindowsIdentityFoundation-SDK-4.0.msi
Toggle Switch Control Library	1.1.1	ToggleSwitch 1.1.1.zip
Infragistics NetAdvantage Ultimate 2013.1	2013.1	NetAdvantage_20131_PlatformInst aller.zip
iTextSharp	5.5.1	itextsharp-all-5.5.1.zip
CLR Security	June 2010	clrsecurity_june10.zip
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz
Community MSI Extensions	1.4	msiext-1.4.zip
TreeViewEx	3.0.0.0	TreeViewEx.dll

Table 4-22. Democracy Suite 5.5-B ImageCast Precinct Election Firmware Compiler Descriptions

Firmware/Software	Version	Filename
g++ (GNU C++	gaa2 4.0.20040602	m68k-uclinux-tools-c++-gcc3.4.0-
compiler)	gcc3.4.0-20040603	20040603.sh

Table 4-23. Democracy Suite 5.5-B ImageCast Precinct Firmware Build Environment Component Descriptions

Firmware/Software	Version	Filename
Ubuntu 16.04.1	16.04.1	ubuntu-16.04.1-desktop-i386.iso
Toolchain Installation Script	N/A	Toolchain.sh

Table 4-23. Democracy Suite 5.5-B ImageCast Precinct Firmware Build Environment Component Descriptions (continued)

Firmware/Software	Version	Filename
m68k uClinux tools base gcc	3.4.0-20040603	m68k-uclinux-tools-base-gcc3.4.0-
moon weman tools cust get	21.110 200 10000	20040603.sh
m68k uClinux tools c++ gcc	3.4.0-20040603	m68k-uclinux-tools-c++-gcc3.4.0-
mook definda tools e++ gee	3.4.0-20040003	20040603.sh
m68k uClinux tools gdb	20040603	m68k-uclinux-tools-gdb-20040603.sh
OpenSSL 1.0.2k	1.0.2k	openssl-1.0.2k.tar.gz
OpenSSL FIPS 2.0.10	2.0.10	openssl-fips-2.0.10.tar.gz

Table 4-24. Democracy Suite 5.5-B ImageCast Precinct 2 Firmware Build Environment Component Descriptions

Firmware/Software	Version	Filename
Ubuntu	16.04 LTS	ubuntu-16.04.5-desktop-amd64.iso
Yocto	imx-morty	morty.tar.gz
asciidoc	8.6.9	asciidoc_8.6.9-3_all.deb
autoconf	2.69	autoconf_2.69-9_all.deb
automake	1.15	automake_1%3a1.15-4ubuntu1_all.deb
p7zip- full	9.20.1~dfsg.1	p7zip-full_9.20.1~dfsg.1-4.2_amd64.deb
avr-libc	1.8.0+Atmel3.5.0	avr-libc_1%3a1.8.0+Atmel3.5.0-1_all.deb
binutils-avr_	2.25+Atmel3.5.0	binutils-avr_2.25+Atmel3.5.0- 2_amd64.deb
python-dev	2.7.12	python-dev_2.7.12-1~16.04_amd64.deb
python3	3.5.1	python3-dev_3.5.1-3_amd64.deb
python3-pip	8.1.1	python3-pip_8.1.1-2ubuntu0.4_all.deb
python-pysqlite2	2.7.0	python-pysqlite2_2.7.0-1_amd64.deb
chrpath	0.16	chrpath_0.16-1_amd64.deb
socat	1.7.3.1	socat_1.7.3.1-1_amd64.deb
cvs	1.12.13	cvs_2%3a1.12.13+real- 15ubuntu0.1_amd64.deb
desktop-file-utils	0.22	desktop-file-utils_0.22- 1ubuntu5.2_amd64.deb
psutils	1.17.dfsg	psutils_1.17.dfsg-2_amd64.deb
docbook-utils	0.6.14	docbook-utils_0.6.14-3ubuntu1_all.deb
libsdl1.2-dev	1.2.15+dfsg1	libsdl1.2-dev_1.2.15+dfsg1-3_amd64.deb
help2man	1.47.3	help2man_1.47.3_amd64.deb

Table 4-24. Democracy Suite 5.5-B ImageCast Precinct 2 Firmware Build Environment Component Descriptions (continued)

Firmware/Software	Version	Filename
texi2html	1.82+dfsg1	texi2html_1.82+dfsg1-5_all.deb
libgl1-mesa-dev	18.0.5	libgl1-mesa-dev_18.0.5- 0ubuntu0~16.04.1_amd64.deb
libglu1-mesa-dev	9.0.0	libglu1-mesa-dev_9.0.0-2.1_amd64.deb
mercurial	3.7.3	mercurial_3.7.3-1ubuntu1_amd64.deb
g++-5	5.4.0	g++-5_5.4.0- 6ubuntu1~16.04.10_amd64.deb
gawk	4.1.3	gawk_1%3a4.1.3+dfsg-0.1_amd64.deb
lzop	1.03	lzop_1.03-3.2_amd64.deb
gcc	5.4.0	gcc-5_5.4.0- 6ubuntu1~16.04.10_amd64.deb
gcc-5-multilib	5.4.0	gcc-5-multilib_5.4.0- 6ubuntu1~16.04.10_amd64.deb
gcc-avr	4.9.2+Atmel3.5.3	gcc-avr_1%3a4.9.2+Atmel3.5.0- 1_amd64.deb
git	2.7.4	git_1%3a2.7.4-0ubuntu1.4_amd64.deb
zlib	1.2.8	zlib1g-dev_1%3a1.2.8.dfsg- 2ubuntu4.1_amd64.deb
texinfo	6.1.0.dfsg.1	texinfo_6.1.0.dfsg.1-5_amd64.deb
groff	1.22.3	groff_1.22.3-7_amd64.deb

Table 4-25. Democracy Suite 5.5-B ImageCast Evolution Firmware Build Environment Component Descriptions

Firmware/Software	Version	Filename
Ubuntu	10.04 LTS	ubuntu-10.04.4-desktop-i386.iso
LTIB	10.1.1a	ltib-10-1-1a-sv.tar.gz
g++ (GNU C++ compiler)	gcc-4.5.38-	freescale-powerpc-linux-gnu-2011.03-
g++ (GNO C++ complier)	eglibc-2.11.38	38.i686.rpm
autoconf	2.57	autoconf-2.57.tar.bz2
bison	2.3	bison-2.3.tar.bz2
ccache	2.4	ccache-2.4.tar.gz
cksum	19990607	cksum-19990607.tar.gz
cramfs	20081121	cramfs-20081121.tar.gz
distee	2.18.3	distcc-2.18.3.tar.bz2
dtc	1.2.0	dtc-1.2.0.tar.gz
flex	2.5.33	flex-2.5.33.tar.gz
genext2fs	1.4.1	genext2fs-1.4.1.tar.gz

Table 4-25. Democracy Suite 5.5-B ImageCast Evolution Firmware Build Environment Component Descriptions (continued)

Firmware/Software	Version	Filename
gen_init_cpio	2.6.25-rc7	gen_init_cpio-2.6.25-rc7.tar.gz
genromfs	0.5.1	genromfs-0.5.1.tar.gz
git	1.5.6.5	git-1.5.6.5.tar.gz
libtool	1.5	libtool-1.5.tar.gz
lkc	1.4	lkc-1.4.tar.gz
mkspooflinks	3.4	mkspooflinks-3.4.tar.gz
mtd-utils	20060302	mtd-utils-20060302.tar.bz2
mux_server	1.0	mux_server.c
pkg-config	0.21	pkg-config-0.21.tar.gz
sparse	0.4	sparse-0.4.tar.gz
texinfo	4.8	texinfo-4.8.tar.bz2
tunctl	1.5	tunctl-1.5.tar.gz
u-boot-tools	1.1.6	u-boot-tools-1.1.6.tar.bz2
unifdef	1.0	unifdef-1.0.tar.gz
wget	1.9.1	wget-1.9.1.tar.gz
yaffs_utils	20060418	yaffs_utils-20060418.tar.gz
rpm	4.0.4	rpm-4.0.4.tar.gz

Table 4-26. Democracy Suite 5.5-B ImageCast X Firmware Build Environment Component Descriptions

Firmware/Software	Version	Filename
Ubuntu 14.04.4	14.04.4	ubuntu-14.04.4-desktop-amd64.iso

Table 4-27. D-Suite 5.5-B Configuration Files

Configuration File	Version	Filename
ICX Machine Configuration File (MCF)	5.5.12.1_20190510	MCF_5.5.12.1_20190510.mcf
ICP/ICC Device Configuration File (DCF)	5.5.31_20190423	DCF_5.5.31_20190423.dcf
ICE Machine Behavior Settings	5.5.6.3 20190512	behaviorsettings_ICE_5.5.6.3_EAC_2 0190512.mbs
ICP2 Machine Behavior Settings	5.5.1.4 20190510	behaviorsettings_ICP2_5.5.1.4_EAC_ 20190510.mbs

Table 4-28. D-Suite 5.5-B Voting System Equipment

Component	Serial Number
•	Proprietary Hardware
ImageCast Precinct Optical Scanner PCOS-320C	AAFAJFM0061, AAFAJFN0030, AAFAJGI6764, AAFAJEL0352
ImageCast Precinct Optical Scanner PCOS-320A	AANAGCP0347, AANAGCP0002
ImageCast Precinct 2 Optical Scanner PCOS-330A	FAL18480494, FAL18480510
ImageCast Evolution Optical Scanner PCOS-410A	AAFEBIK1847, AAFEBCN0012
ICP Ballot Box BOX-330A	AAUCCFX0083, AAUCCGI0011
ICE Ballot Box	
ICX Inline EMI Filter	[DVS-EMIFILTER-001] thru [DVS-EMIFILTER-003]
ICP2 Ballot Box BOX-350A	
	COTS Hardware
ICX aValue 15" Tablet (SID- 15V)	0E14AF00014, B03G005400006, B033G00540008, 9E274118, 1D274118, Baytrail98D750C0, Baytrail12034DCC, Baytrail9A6550C8
ICX aValue 21" Tablet (SID- 21V)	0E14AF00027, B03G005500019, 03G005500009, 0039BZ2D, 0039B209, Baytrail0039B22D, BaytrailF1B2587F, BaytrailF1B25983
A Value 21" ICX DRE (Prime)	1707101522, 1707101789, 1707101730, 1707101887, 1707101710, 1707101725, 1707101731, 1708100916, 1708100876, 1708100915, 1707101845, 1707101778, 1717101720, 1707101845, 1707101722, 1707202552, 1711300282, 1707100089, 1707101795, 1707101793, 17101793
SII Thermal Printer	1115271A, 1115273A, 115270A, 1115275A
KFI VRP3 Thermal Printer (VVPAT)	KPR000000715, KPR0000078339, KPR0000078377, KPR000000711, KPR000000712, KPR170900010119, KPR0000078337, KPR0000078364, KPR170900008115, KPR0000078339, KPR170900008116, KPR170900010347, KPR170900010119, KPR170900010119, KPR170900010337, KPR170900010338, KPR170900010348
Dell OptiPlex 7440 All In One	HVNRFB2, HVNQFB2, HVNPFB2
Dell PowerEdge R630	4Z07T52
Dell PowerEdge R640	JMP9CM2
Canon imageFormula DR-G1130 Scanner	GF301092, GF304418
Canon DR-M160II Scanner	GX333569, GX333573, GX324846, GX326272, GX319353
Canon DR-M260 Scanner	HG306013, HG306012

Table 4-28. D-Suite 5.5-B Voting System Equipment (continued)

Component	Serial Number
InoTec HiPro 821 Scanner	0078K28, 0080K28
Dell Precision T3420 PC	HS0VFB2, HS0TFB2, HS0RFB2, HS0SFB2, 4TB3MN2, F575HH2
HP LaserJet Pro Printer M402dn	PHBQF20342, PHBQF20345, PHBQC12619, PHBQC19613, PHBQC12519, PHBQD18790, PHBQC12616, PHBQG09329
HP LaserJet Pro Printer M402dne	PHB5D00782, PHB5D04714, PHB5F04770, PHB5B18304, PHB5D04713
Dell OptiPlex 9030 All-In-One	CF73S52
Dell Ultrasharp 24" Monitor U2414H	1PVZ152, 62VZ152
Dell OptiPlex 3050 All-In-One	19YWWK2
Smart Card Reader ACR39	RR374-010362

Table 4-29. D-Suite 5.5-B Voting System Support Equipment

Component	Serial Number
Dell Monitor KM632	FYNTY12, CKX6Y12, CN-0524N3-72461-59H-6U5U
Dell Monitor P2414Hb	CN-0524N3-74261-5AH-2DNU, CN-0524N3-74261- 5AH-2DAU
Dell DVD Multi Recorder GP60NB60	[DVS-Dell-001]
Dell Latitude E7450 Laptop	30GFH72, 369FH72
Dell Latitude e3480 Laptop	1VD3NJ2
Maxim iButton Programmer DS9490R# with DS1402	[DVS-Maxim-001] thru [DVS-Maxim-006]
APC Smart-UPS SMT1500	3\$1536X06436, 3\$1536X06475, 3\$1536X06461, 3\$1536X06485, 3\$1536X06484, 3\$1536X06322, 3\$1536X07467, 3\$1536X06485, 3\$1536X06272, 3\$1536X06201, 3\$1536X07305, 3\$1504X00395, 3\$1504X00396, 351716X02289, W51530180004, 3\$171X06059
Dell X1008 Network Switch	4R8XX42, 26SXX42
Dell X1018 Network Switch	6TN7Y42, 63SXX42
Enabling Devices Sip and Puff	[DVS-enabling devices-001] - [DVS-enabling devices-002]
Cyber Acoustics Headphones ACM-70	[DVS-cyber acoustics-001] - [DVS-cyber acoustics-005]
4-Way Joystick Controller S26	PME QC 1550 12, [DVS-JOY-001], [DVS-JOY-002]
Enablemart # 88906 Rocker (Paddle) Switch	[DVS-paddle-001]
Dell PowerConnect 2808 Network Switch	3S2P0Z1

Table 4-29. D-Suite 5.5-B Voting System Support Equipment (continued)

Component	Serial Number
IOGEAR SDHC/microSDHC 0U51USC410 Card Reader	8632, 8633
Lexar USB 3.0 Dual-Slot Reader	24020845007435
Hoodman Steel USB 3.0 UDMA Reader 102015	[DVS-hoodman-001]
ATI Handset	98862010101-035, 98862010103-075, 00659010100- 046, 98862010100-232, 093015-1-1, 00659010100-035
ATI-USB Handset	02440010100-011, [DVS-ATIUSB-001], [DVS-ATIUSB-002], B104326-1-4-040, B104326-1-4-035
ACS PC-Linked Smart Card Reader ACR39U	RR374-006272, RR374-010356, RR374-010365
Lexar Professional CF Card Reader Workflow CFR1	24050361400108, 24050361401994, 24050361401991, 24050361401990
CORCOM Filter P/N#: 15EMC1	[DVS-CorcomEMIFilter-001]
Delta Filter P/N#: 16PDCG5C	[DVS-DeltaEMIFILTER-001]
Kingston Card Reader FCR-HS4	08738174208132

ATTACHMENT A

Attachment A-1: Report File #7169005633E-00

Attachment A-2: Report File # 7169006118E-00

Attachment A-3: Test Report No. PR094223

Attachment A-4: Test Report No. PR097523